


Data Sheet for Article: LITP0104--

MAIA 2 Round 330 24W/30W 3000K/4000K 230V IP54 white

Wall, ceiling light with adjustable power and light colour, lumen 24W = 2880lm / 30W = 3600lm




Light distribution curve



Technical Data

Net height (mm)	48,00
Net diameter (mm)	330,00
Net weight (kg)	1,10
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	30
Luminaire type	wall luminaires surface mounted ceiling luminaire
Colour	White
Material	PC
Beam angle (°)	120
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	120
Power (W)	24 30
Light colour	neutral white warm white
Colour temperature (K)	4000 3000
Colour rendering index (Ra)	80
Colour stability MacAdam (sdcm)	6
Luminous flux (lm)	3600 2880
Service life	50000
Dimmable	no
Protection class	II
IP Rating	IP54
Shock strength	IK06
Illuminant incl.	yes
ØxH mm	330x48

**Dimensioned drawing: MAIA 2 Round 330 24W/30W 3000K/4000K 230V
IP54 white**

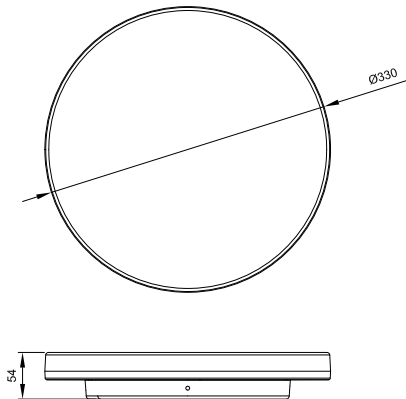

DESCRIPTION	Order No.
MAIA 2 Round 330 24W/30W 3000K/4000K 230V IP54 white	LITP0104
Wall, ceiling light with adjustable power and light colour, lumen 24W = 2880lm / 30W = 3600lm	