


Data Sheet for Article: LIVB0044--

DEVO PRO II 72W 10200lm 830 230V DALI IP66 CL 1 PMMA 1500mm

LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, DALI AC/DC driver, Dip-Switch 46W-7100lm / 53W-8100lm / 62W-9100lm / 72W-10200lm



Light distribution curve



Technical Data


Net length (mm)	1.454,00
Net width (mm)	102,00
Net height (mm)	80,00

Technical Data - continued

Net weight (kg)	2,20
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	35
Colour	Light grey
Cover	PMMA opal
Controller	DALI LED Treiber AC / DC
Operating voltage AC (V)	220-240
Operating voltage DC (V)	176-280V, Start >186
Lamp holder	LED Platine
Colour temperature (K)	3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<3
Dimmable	DALI Touch DIM
Fire protection marking	D
LxWxH mm	1454x102x80
Numbers of luminars per MCB B10	17
Numbers of luminars per MCB B16	28
Numbers of luminars per MCB C10	29
Numbers of luminars per MCB C16	47

Dimensioned drawing: DEVO PRO II 72W 10200lm 830 230V DALI IP66 CL 1 PMMA 1500mm

[mm]

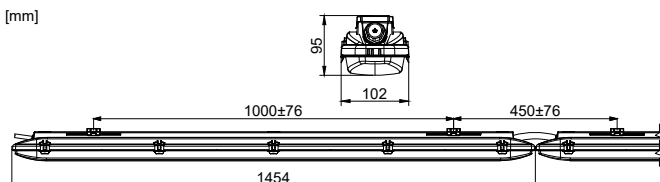

Article Table

DESCRIPTION	Order No.
DEVO PRO II 72W 10200lm 830 230V DALI IP66 CL 1 PMMA 1500mm	
LED moisture-proof diffuser luminaire with grey GFRP housing, opal diffuser and inox clips, DALI AC/DC driver, Dip-Switch	LIVB0044
46W-7100lm / 53W-8100lm / 62W-9100lm / 72W-10200lm	
Optional Accessories	
Cover PMMA Opal for DEVO PRO II 1500mm	LIVB0025
Cover PC Opal for DEVO PRO II 1500mm	LIVB0027

Article Table

DESCRIPTION	Order No.
Optional Accessories	
Ceiling bracket for DEVO PRO	LIVB0036
Linux mounting bracket for DEVO PRO, 10 pieces	LIVB0037
Flush-mounted Dimmer inbox for Dali Ballasts or Drivers For push button control	EHDALIDIM
LINDA mounting set 45° for T5/T8	LI2JLT0450
LINDA wall mounting set 90° for 18/36/58W	LI2JLT0452
Holder for wire rope with Ø 1,5 - 2,5mm for Series Arktur Eco	LI00501005
Wire rope with loop Length 3000 mm Ø 2mm for Serie ARKTUR ECO	LI00573961
L-SE Chain KE galvanized	LI8B000068