


Data Sheet for Article: LIVI0011 --

SOLO ECO 24W/48W 3600lm/7200lm 830/840 230V L-1416mm white

LED batten luminaire



Light distribution curve




Technical Data

Net length (mm)	1.410,00
Net width (mm)	63,00
Net height (mm)	76,00
Net weight (kg)	1,59
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Luminaire type	wall luminaires surface mounted ceiling luminaire

Technical Data - continued

Mounting	surface mounting ceiling surface mounting wall pendant
Colour	White
Material	PC sheetsteel
Cover	opal
Beam angle (°)	120
Controller	LED driver
Operating voltage AC (V)	220-240
Lamp holder	LED Platine
System efficiency (lm/W)	110
Power (W)	24 48
Light colour	neutral white
Colour temperature (K)	4000 3000
Colour rendering index (Ra)	≥80
Colour stability MacAdam (sdcm)	<5
Luminous flux (lm)	6000
Service life	50.000h L90 B50
Dimmable	no
Protection class	I
IP Rating	IP20
Shock strength	IK02
Illuminant incl.	yes
Cycle of operation	100000
LxWxH mm	1410x63x76
Numbers of luminars per MCB B10	10
Numbers of luminars per MCB B16	17
Numbers of luminars per MCB C10	17
Numbers of luminars per MCB C16	28

**Dimensioned drawing: SOLO ECO 24W/48W 3600lm/7200lm 830/840 230V
L-1416mm white**

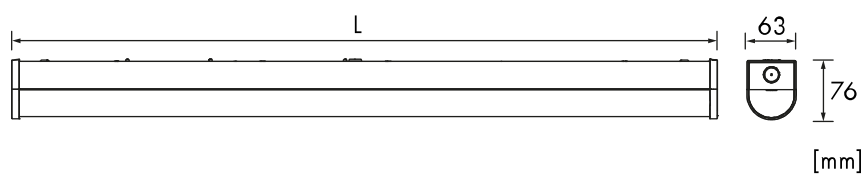

DESCRIPTION	Order No.
SOLO ECO 24W/48W 3600lm/7200lm 830/840 230V L-1416mm white LED batten luminaire	LIVI0011