

Data Sheet for Article: LIVT4854--

LED Premium Panel Downlight 6W - round

3000K, 420lm, 120° **ECONOMY**

including driver, quick connector




Technical Data

LxWxH mm	120x120x25
ØxH mm	120x25
Cut-out size mm	Ø 110
Colour	White
Material	Aluminum PS PMMA
Mounting	recessed mounting ceiling
Cut-out size (mm)	Ø 110
Operating voltage AC (V)	200-240
Light colour	warm white
Luminous flux (lm)	420
Power Factor	>0.5
Colour rendering index (Ra)	≥80

Technical Data - continued

Dimmable	no
Colour temperature (K)	3000
Service life	20.000h
Beam angle (°)	120
IP Rating	IP20
Protection class	II

Dimensioned drawing: LED Premium Panel Downlight 6W - round 3000K, 420lm, 120°

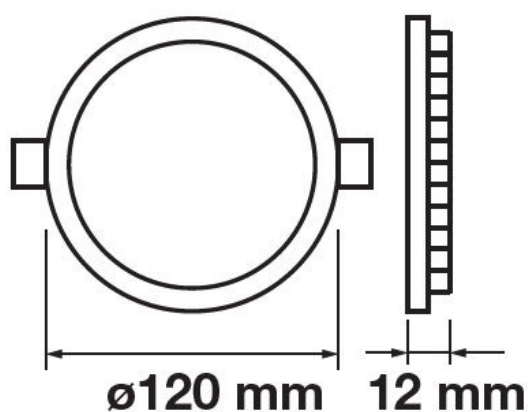

DESCRIPTION	Order No.
LED Premium Panel Downlight 6W - round 3000K, 420lm, 120° including driver, quick connector	LIVT4854