

Data Sheet for Article: LIVT4870--

LED Premium Panel Downlight 18W - square

4500K, 1500lm, 120° ECONOMY

including driver, quick connector




Technical Data

LxWxH mm	225x225x25
Cut-out size mm	205x205
Colour	White
Material	Aluminum PS PMMA
Mounting	recessed mounting ceiling
Cut-out size (mm)	205x205
Operating voltage AC (V)	200-240
Light colour	neutral white
Luminous flux (lm)	1500
Power Factor	>0.6
Colour rendering index (Ra)	≥80
Dimmable	no

Technical Data - continued

Colour temperature (K)	4500
Service life	20.000h
Beam angle (°)	120
IP Rating	IP20
Protection class	II

Dimensioned drawing: LED Premium Panel Downlight 18W - square 4500K, 1500lm, 120°

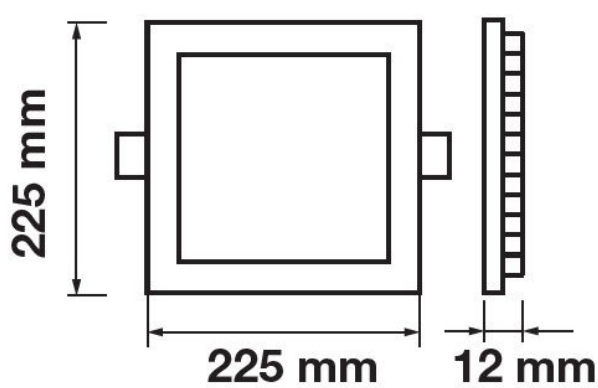

DESCRIPTION	Order No.
LED Premium Panel Downlight 18W - square 4500K, 1500lm, 120° including driver, quick connector	LIVT4870