

Remote switch, series Amparo, 1 NO, 24VAC

Bistable DIN-rail-relay, switchable to manual or auto mode, as well as manual operation



Technical Data

Net width (mm)	18,00
Net height (mm)	86,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	55
Overvoltage category/pollution degree	II / 1
Contacts	1 NO
Poles	1
Contact material	Ag alloy
Rated voltage [Resistive load]	250VAC
Rated current [Resistive load] (A)	16
Switching capacity [Resistive]	4000VA 448W
Mechanical durability	1000000 operational cycles
Electrical endurance (Operation cycle)	100000
Coil resistance	23,5Ω
Insulation resistance (MΩ * km)	100MΩ (500VDC)
Dielectric strength	
Between coil and contacts (VAC)	1500
Between open contacts	1500VAC


Technical Data - continued

Coil information

Voltage range (V)

| (85%~110%)Un

Dimensioned drawing: Remote switch, series Amparo, 1 NO, 24VAC

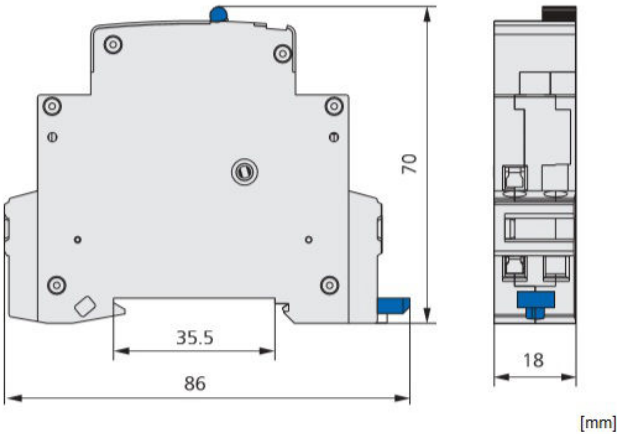

DESCRIPTION	Order No.
Remote switch, series Amparo, 1 NO, 24VAC	LQA01024
Bistable DIN-rail-relay, switchable to manual or auto mode, as well as manual operation	