

Data Sheet for Article: LQA02024--

Remote switch, series Amparo, 2 NO, 24VAC

Bistable DIN-rail-relay, switchable to manual or auto mode, as well as manual operation



Technical Data

Net width (mm)	18,00
Net height (mm)	86,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	45
Overvoltage category/pollution degree	II / 1
Contacts	2 NO
Poles	2
Contact material	Ag alloy
Rated voltage [Resistive load]	250VAC
Rated current [Resistive load] (A)	16
Switching capacity [Resistive]	4000VA 448W
Mechanical durability	1000000 operational cycles
Electrical endurance (Operation cycle)	100000
Coil resistance	23,5Ω
Insulation resistance (MΩ*km)	100MΩ (500VDC)
Dielectric strength	
Between coil and contacts (VAC)	1500
Between open contacts	1500VAC


Technical Data - continued

Coil information

Voltage range (V)

| (85%~110%)Un

Dimensioned drawing: Remote switch, series Amparo, 2 NO, 24VAC

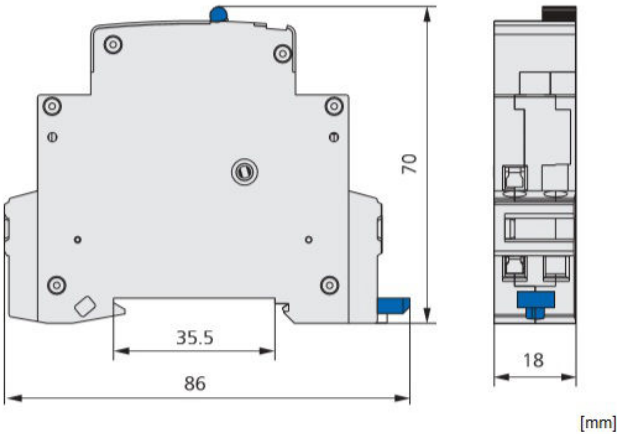

DESCRIPTION	Order No.
Remote switch, series Amparo, 2 NO, 24VAC	LQA02024
Bistable DIN-rail-relay, switchable to manual or auto mode, as well as manual operation	