

Data Sheet for Article: MAIL3100D-

LED steady light, 24V AC/DC, orange

Base required, Version constant, Control Constant, Voltage range AC/DC 24V



Technical Data

Series	MA 24V
Version	constant
Color of LED	Orange
Voltage range (V)	AC/DC 24
Control	Constant
IP Rating	IP66
Diameter (mm)	110
Inlets	depends on base
Necessary Accessories	MAIB0006--;MAIZ0001--
Optional Accessories	MAIB0005--;MAIW0005--
Light source	LED
Terminal type	Screw terminal
Lens	Polycarbonate, ribbed inside
mounting	any
Service life	100000
Temperature range - Operation (°C)	-30 to +60


Technical Data - continued

Impact Resistance	IK08
Rated current (A)	0,91
Connections	2.5mm ² /14AWG
Installation diameter (mm)	110
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]
Housing	Polycarbonate black (RAL 9005)

Connection Table

			
N	I		
N	L	—	Steady

Dimension

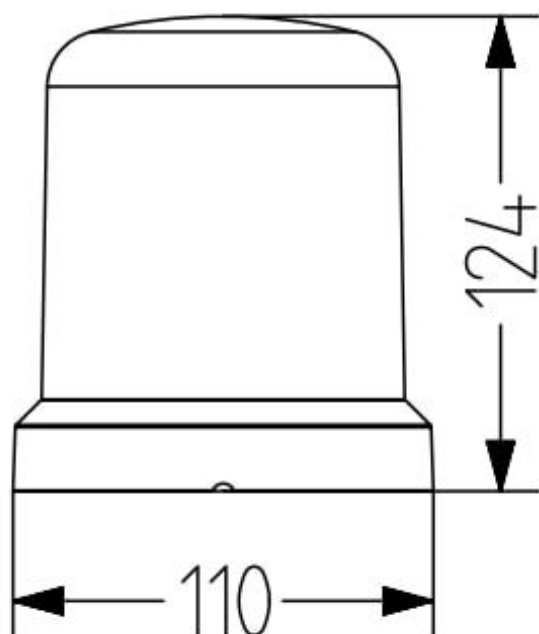

Article Table

DESCRIPTION	Order No.
LED steady light, 24V AC/DC, orange	MAIL3100D
Base required, Version constant, Control Constant, Voltage range AC/DC 24V	
Necessary Accessories	
Low Base for Round Signal Lights	MAIB0006
for Round Signal Lights, Version accessories	
Flat gasket for Round Signal Lights	MAIZ0001
Version accessories, for Round Signal Lights	
Optional Accessories	
High Base for Round Signal Lights	MAIB0005
for Round Signal Lights, Version accessories	
Metal bracket for vertical mounting of Round Signal Lights	MAIW0005
Version accessories, for Round Signal Lights	