

Data Sheet for Article: MAIL3100M-

LED square steady/ flashing light orange, 24V AC/DC

housing red, Lens in Colour of LED, Version flash / constant, Control Multipole cable, Voltage range AC/DC 24V



Technical Data

Series	MA 24V
Version	flash / constant
Color of LED	Orange
Voltage range (V)	AC/DC 24
Control	Multipole cable
IP Rating	IP66
Inlets	bottom/side entry
Necessary Accessories	MAIZ0002--
Optional Accessories	MAIZ0003--
Light source	LED
Terminal type	Screw terminal
Lens	Polycarbonate, ribbed inside
mounting	any


Technical Data - continued

Service life	100000
Temperature range - Operation (°C)	-30 to +60
Impact Resistance	IK09
Rated current (A)	0,10
Connections	2.5mm²/14AWG
Flash frequency (Hz)	1
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]
Housing	Polycarbonate red (RAL 3000)

Connection Table

					
La	N	Lb			
L	N			Blinking 2Hz	-----
L	N	L		Steady	—

Dimension

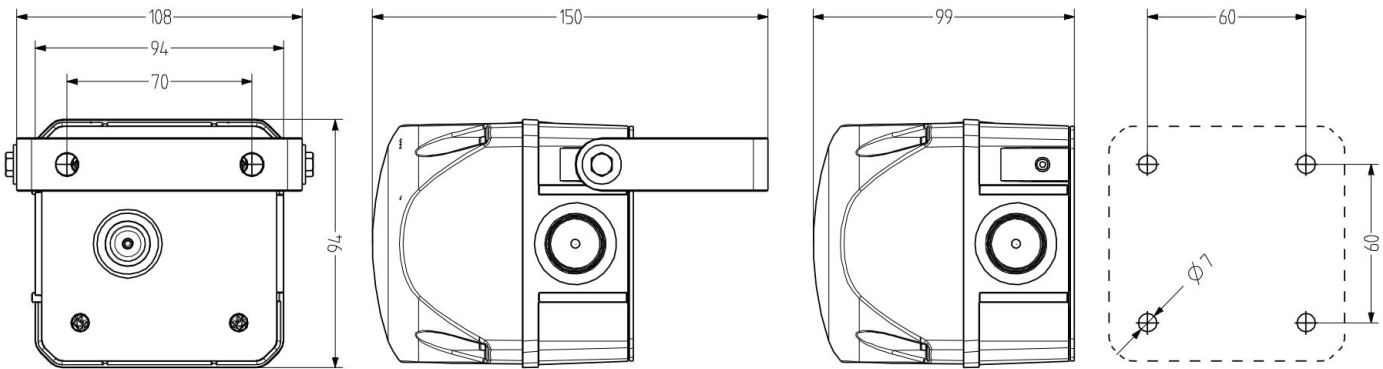

Article Table

DESCRIPTION	Order No.
LED square steady/flashing light orange, 24V AC/DC housing red, Lens in Colour of LED, Version flash / constant, Control Multipole cable, Voltage range AC/DC 24V	MAIL3100M
Necessary Accessories	
Sealing for Square Signal Lights Version accessories, for Square Signal Lights	MAIZ0002
Optional Accessories	
Connector for two Square Signal Lights Version accessories, for Square Signal Lights	MAIZ0003