

Data Sheet for Article: MAIL9200--

Compact LED multicolor light, 110-240VAC

Base required, Version multi colour, Control Multipole cable, Voltage range AC 110-240V



Technical Data

Series	MA 230V
Version	multi colour
Color of LED	Multi Color
Voltage range (V)	AC 110-240
Control	Multipole cable
IP Rating	IP66
Diameter (mm)	110
Inlets	depends on base
Necessary Accessories	MAIB0006--;MAIZ0001--
Optional Accessories	MAIB0005--;MAIW0005--
Light source	LED
Terminal type	Screw terminal
Lens	Polycarbonate, ribbed inside
mounting	any
Service life	100000
Temperature range - Operation (°C)	-30 to +60


Technical Data - continued

Impact Resistance	IK08
Rated current (A)	0,04
Connections	2.5mm ² /14AWG
Flash frequency (Hz)	1-2
Installation diameter (mm)	110
Duty factor (% DF)	100
Leakage Current	3mA [PLC suitable]
Housing	Polycarbonate black (RAL 9005)

Datei Tabelle: Compact LED multicolor light, 110-240VAC

							
N	1	2	3				
N	L			Green	Green	Green	Green
N		L		Yellow	Amber blink	Amber blink	Amber blink
N			L	Red	Red blink	Red blink	Red blink
N	L	L		Blue	Green beat	Green beat	Green beat
N	L		L	Turquoise	Red flash (6) 1,0Hz	Red flash (6) 1,0Hz	Red flash (6) 1,0Hz
N		L	L	Magenta	White beat	White low (50%)	Blue blink
N	L	L	L	White	White	White	White beat

Dimension

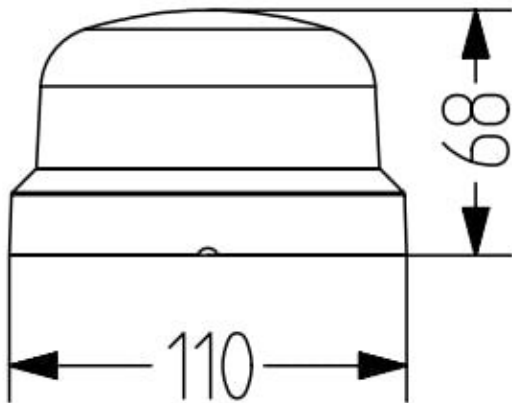

Article Table

DESCRIPTION	Order No.
Compact LED multicolor light, 110-240VAC Base required, Version multi colour, Control Multipole cable, Voltage range AC 110-240V	MAIL9200
Necessary Accessories	
Low Base for Round Signal Lights for Round Signal Lights, Version accessories	MAIB0006
Flat gasket for Round Signal Lights Version accessories, for Round Signal Lights	MAIZ0001
Optional Accessories	
High Base for Round Signal Lights for Round Signal Lights, Version accessories	MAIB0005
Metal bracket for vertical mounting of Round Signal Lights Version accessories, for Round Signal Lights	MAIW0005