

Data Sheet for Article: **MAIM2100D-**

# LED steady light module, 24V AC/DC, red

Base required, Version constant, Make-up module, Control Constant, Voltage range AC/DC 24V




## Technical Data

|                                    |                                             |
|------------------------------------|---------------------------------------------|
| Series                             | MA 24V                                      |
| Version                            | constant                                    |
| Color of LED                       | Red                                         |
| Voltage range (V)                  | AC/DC 24                                    |
| Make-up                            | module                                      |
| Control                            | Constant                                    |
| IP Rating                          | IP66                                        |
| Diameter (mm)                      | 70                                          |
| Inlets                             | depends on base                             |
| Optional Accessories               | MAIB0001--;MAIB0002--;MAIR0001--;MAIA3100-- |
| Light source                       | LED                                         |
| Lens                               | Polycarbonate, ribbed inside                |
| mounting                           | any                                         |
| Service life                       | 100000                                      |
| Temperature range - Operation (°C) | -30 to +60                                  |

## Technical Data - continued

|                            |                    |
|----------------------------|--------------------|
| Impact Resistance          | IK08               |
| Rated current (A)          | 0,05               |
| Maximum modules used       | 5                  |
| Installation diameter (mm) | 70                 |
| Duty factor (% DF)         | 100                |
| Leakage Current            | 3mA [PLC suitable] |

## Dimension

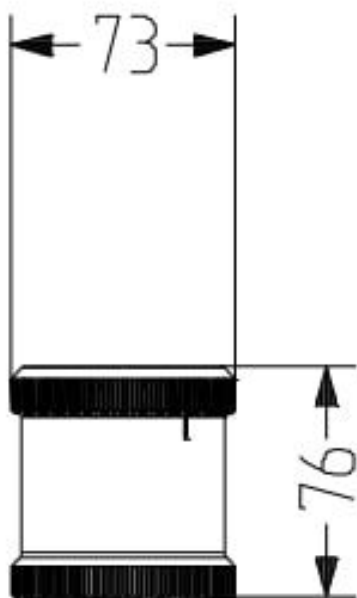

## Article Table

| DESCRIPTION                                                                                                                                                                                                                                                                | Order No. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| LED steady light module, 24V AC/DC, red<br>Base required, Version constant, Make-up module, Control Constant, Voltage range AC/DC 24V                                                                                                                                      | MAIM2100D |
| <b>Optional Accessories</b>                                                                                                                                                                                                                                                |           |
| Standard Base for Signal Towers modular, Black<br>1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp                                          | MAIB0001  |
| Vertical Base for Signal Towers modular, Black<br>1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp                                          | MAIB0002  |
| Tube base for Signal Towers, Alu-tube with plastic foot, 100mm<br>1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp | MAIR0001  |
| Multi-tone siren, 8 tones, 24V AC/DC<br>Base required, only mountable as top modul, Version Multi Tone, Make-up module, Control Dip switch, Voltage range AC/DC 24V                                                                                                        | MAIA3100  |