

Data Sheet for Article: MAIM3200F-

# LED flashing light module, 230-240VAC, orange

Base required, Version flash, Make-up module, Control Constant, Voltage range AC 230-240V




## Technical Data

|                      |                                             |
|----------------------|---------------------------------------------|
| Series               | MA 230V                                     |
| Version              | flash                                       |
| Color of LED         | Orange                                      |
| Voltage range (V)    | AC 230-240                                  |
| Make-up              | module                                      |
| Control              | Constant                                    |
| IP Rating            | IP66                                        |
| Diameter (mm)        | 70                                          |
| Inlets               | depends on base                             |
| Optional Accessories | MAIB0001--;MAIB0002--;MAIR0001--;MAIA3100-- |
| Light source         | LED                                         |
| Lens                 | Polycarbonate, ribbed inside                |
| mounting             | any                                         |

## Technical Data - continued

|                                    |                    |
|------------------------------------|--------------------|
| Service life                       | 100000             |
| Temperature range - Operation (°C) | -30 to +60         |
| Impact Resistance                  | IK08               |
| Rated current (A)                  | 0,01               |
| Flash frequency (Hz)               | 1,40               |
| Maximum modules used               | 5                  |
| Installation diameter (mm)         | 70                 |
| Duty factor (% DF)                 | 100                |
| Leakage Current                    | 3mA [PLC suitable] |

## Dimension

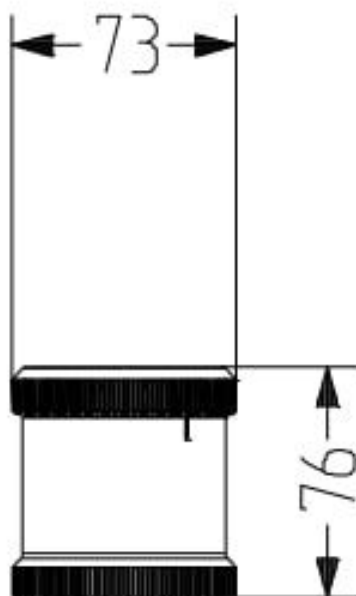

## Article Table

| DESCRIPTION                                                                                                                                                                                              | Order No. |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| LED flashing light module, 230-240VAC, orange                                                                                                                                                            | MAIM3200F |
| Base required, Version flash, Make-up module, Control Constant, Voltage range AC 230-240V                                                                                                                |           |
| <b>Optional Accessories</b>                                                                                                                                                                              |           |
| Standard Base for Signal Towers modular, Black                                                                                                                                                           | MAIB0001  |
| 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp                          |           |
| Vertical Base for Signal Towers modular, Black                                                                                                                                                           | MAIB0002  |
| 1 to max. 5 modules per base mountable, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp                          |           |
| Tube base for Signal Towers,Alu-tube with plastic foot,100mm                                                                                                                                             | MAIR0001  |
| 1 to max. 5 modules per base mountable, with plastic base 100mm, including end cap, usable for all modules (230-240VAC and 24V AC/DC), Version accessories, Make-up empty base, Terminal type Cage clamp |           |
| Multi-tone siren, 8 tones, 24V AC/DC                                                                                                                                                                     | MAIA3100  |
| Base required, only mountable as top modul, Version Multi Tone, Make-up module, Control Dip switch, Voltage range AC/DC 24V                                                                              |           |