

Data Sheet for Article: MC363044--

Switch Disconnecter, 4-pole, 630A - not remotely releasable

Device category switch disconnector, not remotely releaseable, Size type 3, Rated current 630A, Poles 4, IP Rating IP20, Tripping Unit without protection




Technical Data

Net width (mm)	185,00
Net height (mm)	275,00
Net weight (kg)	7,10
EAN	9004840386516
Power loss (W)	107,00
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	60
Device category	switch disconnector, not remotely releaseable
Rated current (A)	630
Size type	3
Tripping Unit	without protection
Poles	4
Standard	IEC EN 60947 VDE 0660
Short-circuit protection maximum fuse	630
IP Rating	IP20

Technical Data - continued

Rated operational current (A)	630
Overvoltage category/pollution degree	III/3
Rated insulation voltage [Ui] (V)	1000
Short circuit making capacity (kA)	25
AC-1	
400 V	5000
415 V	5000
660 V 690 V (A)	3000
AC-23A	2000
Solid [main cable] (mm ²)	2 x 16
	1 x 16
Stranded [main cable] (mm ²)	2 x (25 - 120)
	1 x (25 - 120)

Dimensioned drawing: Switch Disconnecter, 4-pole, 630A - not remotely releasable

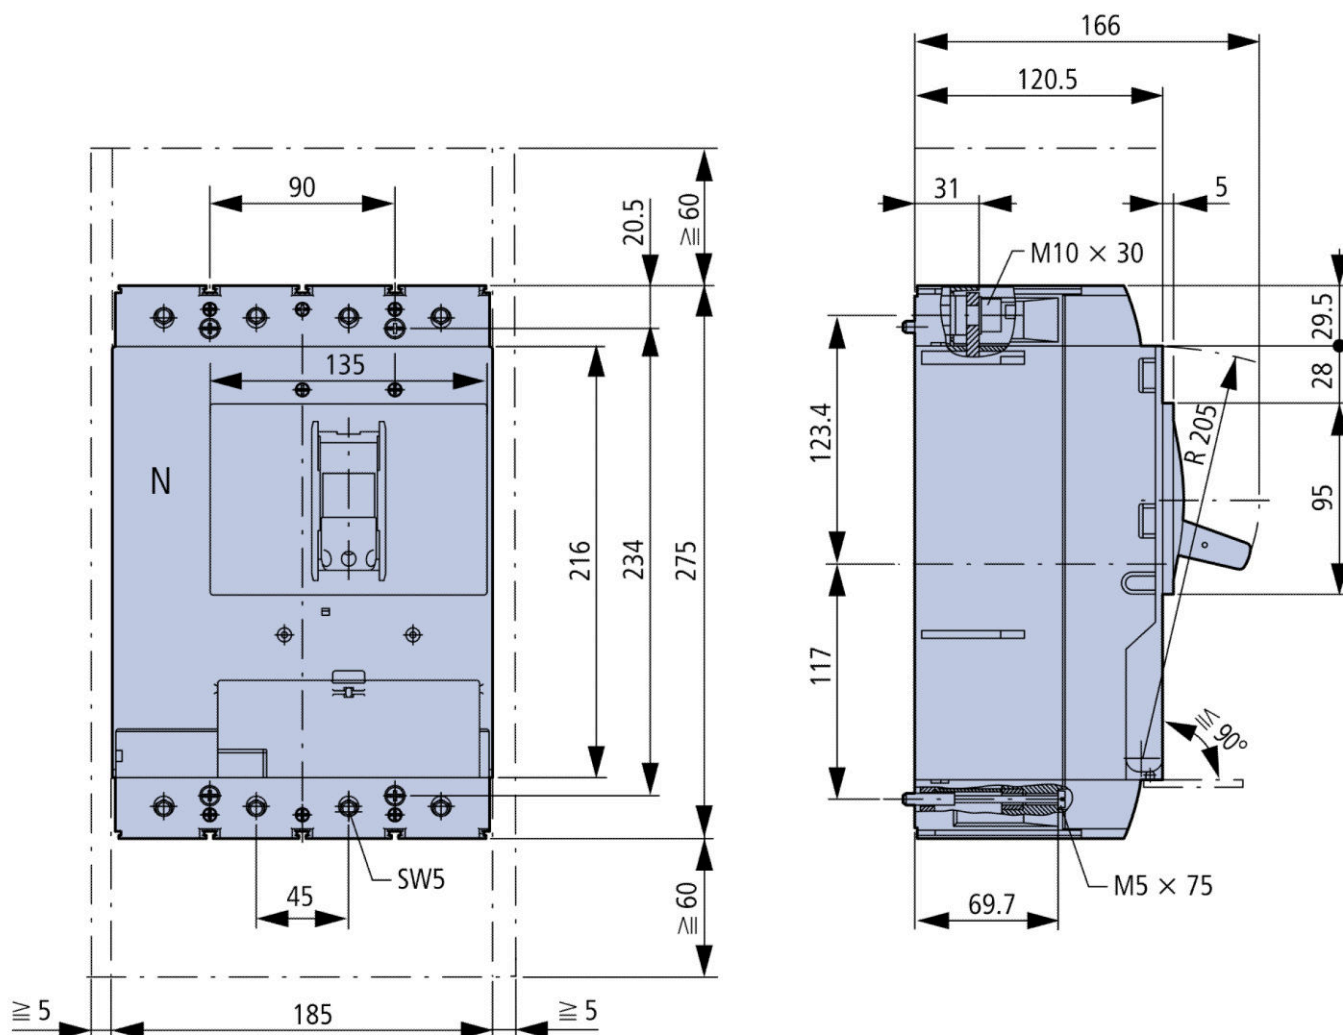

DESCRIPTION	Order No.
Switch Disconnecter, 4-pole, 630A - not remotely releasable	
Device category switch disconnector, not remotely releaseable, Size type 3, Rated current 630A, Poles 4, IP Rating IP20, Tripping	MC363044
Unit without protection	