


Data Sheet for Article: MGC56160--

Current transformer 1600A/5A, 60 x 30mm, class 0.5

Input current 1600A, Burden Class 0.5 (10VA)

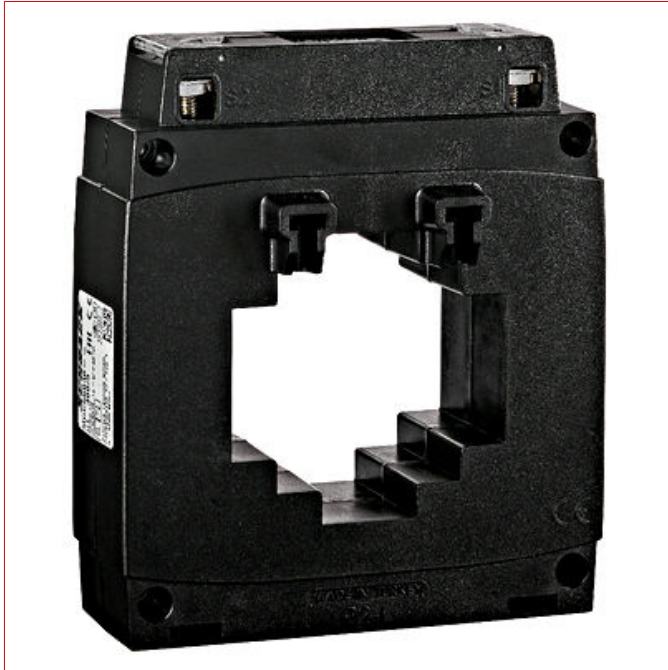


Technical Data

IP Rating	IP20
Burden	Class 0.5 (10VA)
Note	Due to dangerous overvoltage and overheating, the Current Transformer is not allowed to be operated with open secondary Side. (EN 60044-1 /A2) As soon as the Measurement Device, the Energy Counter or the Net Analyzer is disconnected, the secondary Side has to be shortcuted!
Intended use	for copper bars up to 50 x 30mm for copper bars up to 60 x 10mm
Product standard	EN 61869-2
Cut-out size (mm)	50x30 / 60x10
Insulation requirements	
Max. Operating voltage Um	0.72kV r.m.s.
Isolation test voltage	3 kV R.M.S. 50 Hz/1 min
Isolation	Class B (EN/IEC 61869-1, 61869-2)
Specifications	
Rated current primary side Ipr (A)	1600

Technical Data - continued

Rated frequency (Hz)	50-60Hz
Short-time current I _{th}	< 60I _{pr}
Thermal rated continuous current according to EN60044-1	
Rated dynamic current I _{dyn}	2.5I _{th}
Rated current secondary side I _{sr}	5A
Tightening torque (Nm)	2
Housing material	Polycarbonate, self-extinguishing
Accuracy classes	
Reference temperature (°C)	23°C ±1°C
Load current error	For class 0.5 and 5% I _n : ±1.5% For class 0.5 and 120% I _n : ±0.5% For class 0.5 and 100% I _n : ±0.5% For class 0.5 and 20% I _n : ±0.75%
Working conditions	
Temperature range - Transport/storage (°C)	-25 to +60
Temperature range - Operation (°C)	-5 to +40

Maßbild MGC56160--

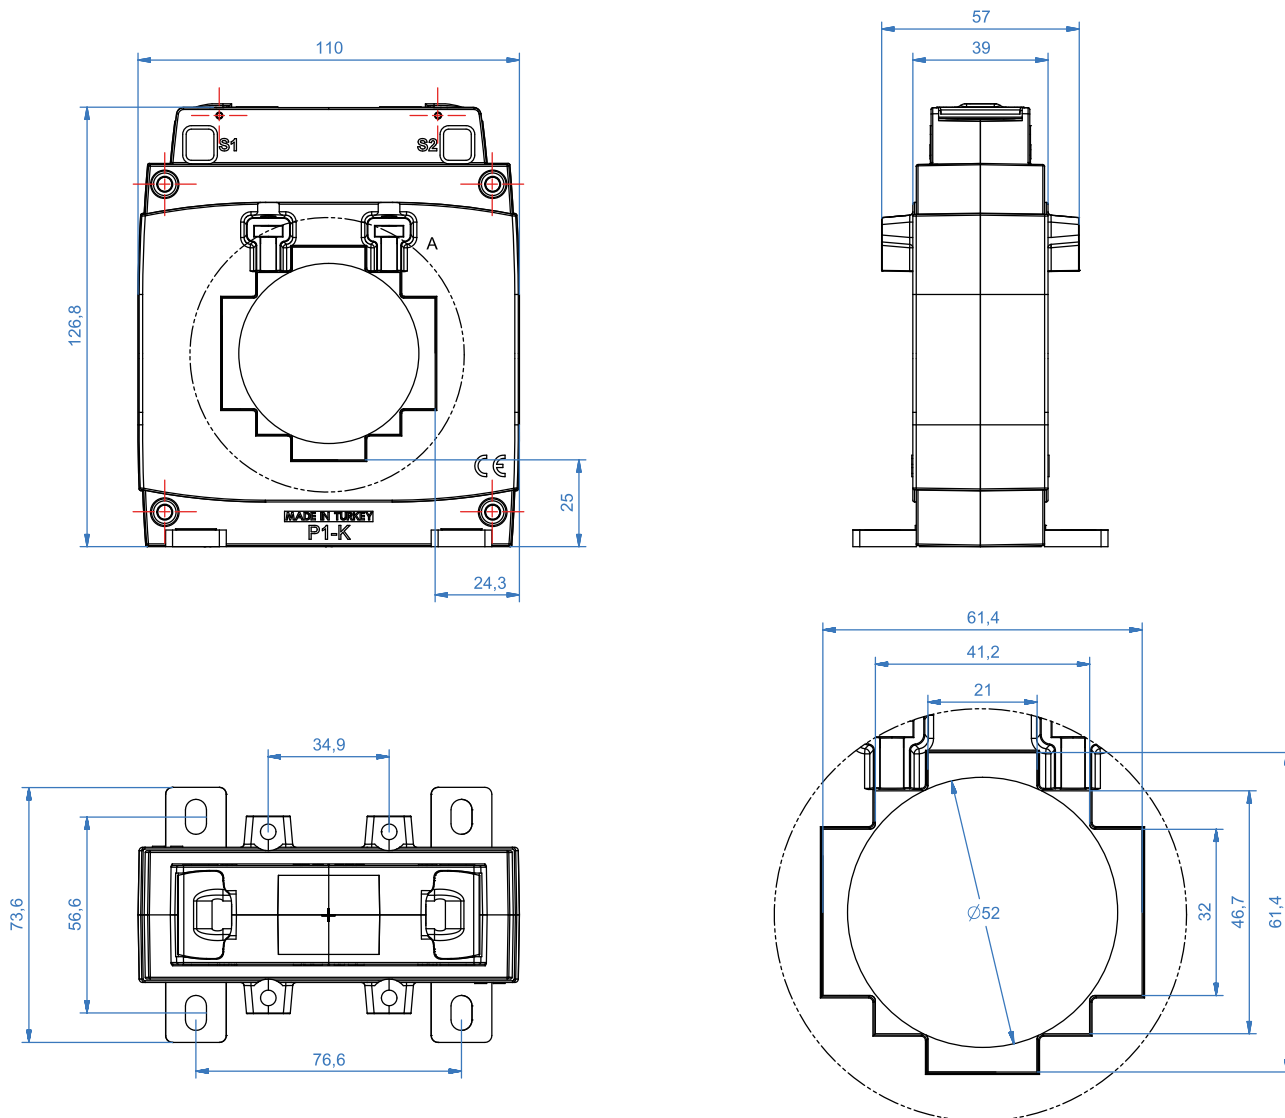

DESCRIPTION

Current transformer 1600A/5A, 60 x 30mm, class 0.5

Input current 1600A, Burden Class 0.5 (10VA)

Order No.

MGC56160