

Data Sheet for Article: MM216532--

**Compl. encl., 3 push-butt., I / O / II,
gn/rd/gn, 3 x 1NO+1NC**

Make-up Surface mount housing, Version Screw terminal, Illumination No, Colour Black/light gray, IP Rating IP67,IP69K, Series MM-SET




Technical Data

Series	MM-SET
Version	Screw terminal
Illumination	No
Colour	Black/light gray
Device category	3
Make-up	Surface mount housing
IP Rating	IP69K IP67
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Actuating force (N)	5
Lifespan, mechanical	5000000 Operations

Technical Data - continued

Operating frequency	< 3600 Operations
Mounting position	any
Type No.	M22-I3-M1

Maßbild

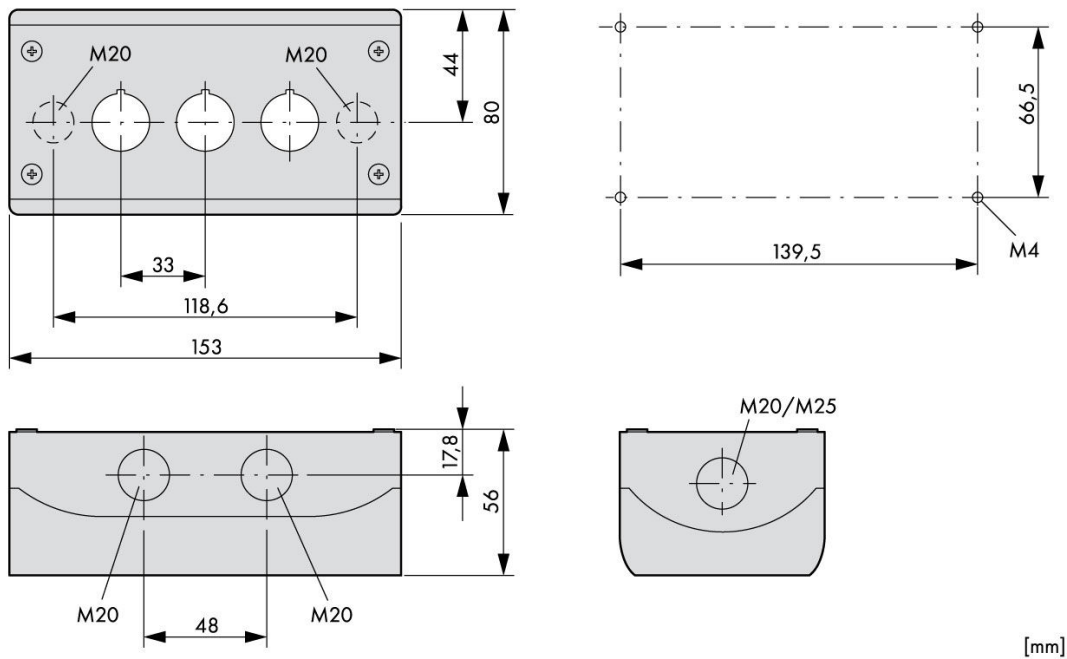

DESCRIPTION	Order No.
Compl. encl., 3 push-butt., I / O / II, gn/rd/gn, 3 x 1NO+1NC Make-up Surface mount housing, Version Screw terminal, Illumination No, Colour Black/light gray, IP Rating IP67,IP69K, Series MM-SET	MM216532