

Data Sheet for Article: MM216605--

Push-button flat, `0`, spring-return, red

Make-up pushbuttons, Version flat,spring-return, Illumination No, Colour Red, IP Rating IP67,IP69K, Series MM




Technical Data

Series	MM
Version	spring-return flat
Illumination	No
Colour	Red
Make-up	pushbuttons
IP Rating	IP69K IP67
Necessary Accessories	MM216374--;MM216376--;MM216378--
Optional Accessories	MM216395--
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Actuating force (N)	5
Lifespan, mechanical	5000000 Operations

Technical Data - continued

Operating frequency	< 3600 Operations
Mounting position	any
Type No.	M22-D-R-X0

Maßbild

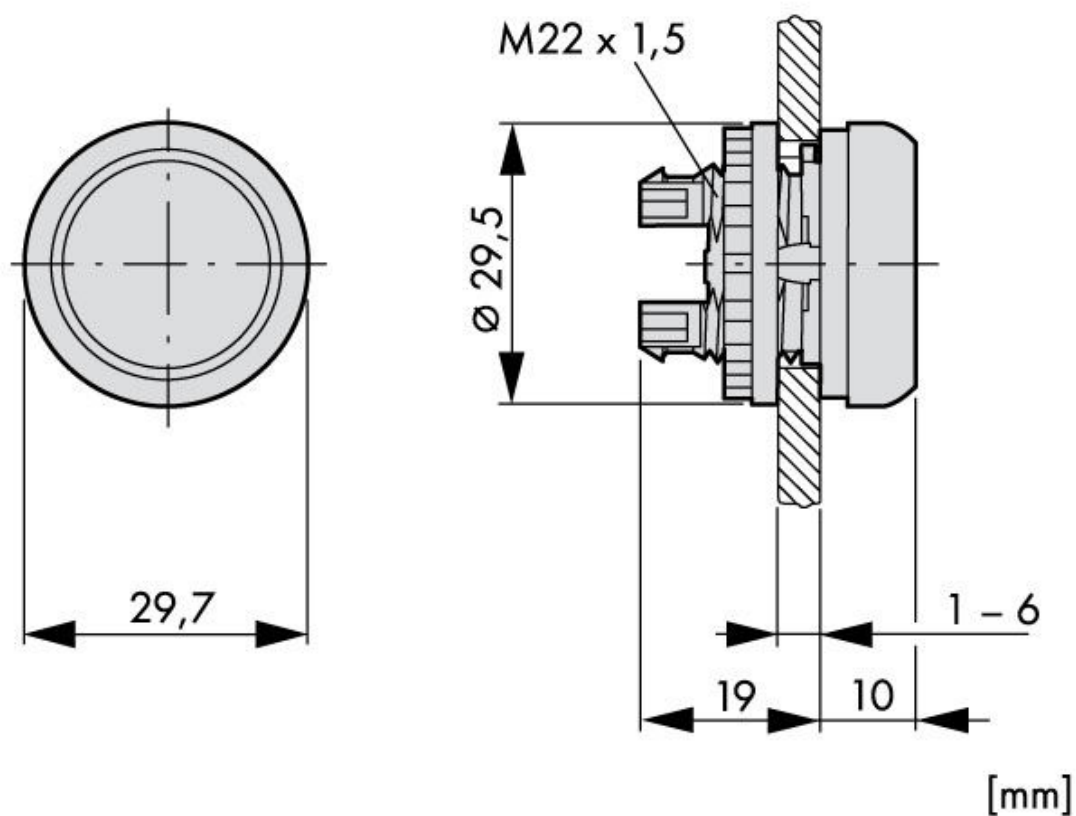

Article Table

DESCRIPTION	Order No.
Push-button flat, `O´, spring-return, red	MM216605
Make-up pushbuttons, Version flat,spring-return, Illumination No, Colour Red, IP Rating IP67,IP69K, Series MM	
Necessary Accessories	
Adapter (front)	MM216374
Make-up Mounting adapter, Illumination No, Colour Black, Series MM	
NO contact block front mount	MM216376
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	
NC contact block front mount	MM216378
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	
Optional Accessories	
Diaphragm,flat push-but.+indic.light	MM216395
Make-up Key protection membrane, Illumination No, Colour Plastic transparent, Series MM	