

Data Sheet for Article: MM216837--

III. sel. switch, 3 pos., spring-return, green, clamp handle

Make-up Illuminated toggle, Version spring-return, I-O-II, Illumination for passive illumination, Colour Green , IP Rating IP66, Series MM




Technical Data

Series	MM
Version	spring-return I-O-II
Handle type	Toggle
Illumination	for passive illumination
Colour	Green
Make-up	Illuminated toggle
IP Rating	IP66
Necessary Accessories	MM216374--;MM216376--;MM216378--
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Tightening torque (Nm)	0,30

Technical Data - continued

Lifespan, mechanical	100000 Operations
Operating frequency	< 2000 Operations
Mounting position	any
Type No.	M22-WLK3-G

Maßbild

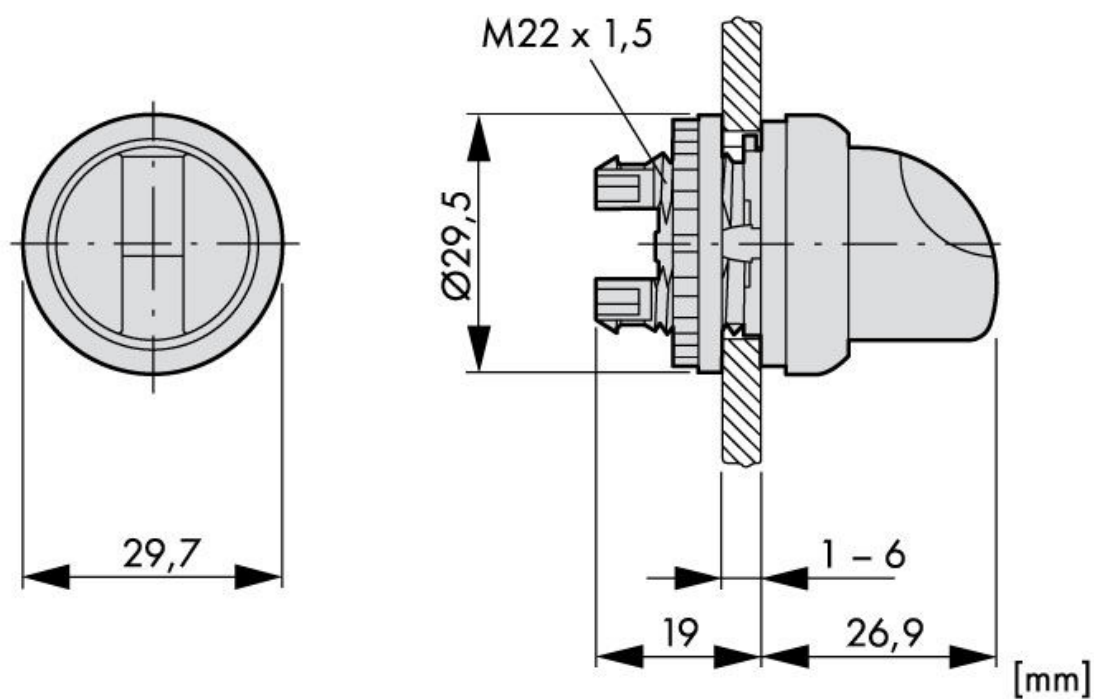

Article Table

DESCRIPTION	Order No.
Ill. sel. switch, 3 pos., spring-return, green, clamp handle Make-up Illuminated toggle, Version spring-return,I-O-II, Illumination for passive illumination, Colour Green , IP Rating IP66, Series MM216837 MM	
Necessary Accessories	
Adapter (front) Make-up Mounting adapter, Illumination No, Colour Black, Series MM	MM216374
NO contact block front mount Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216376
NC contact block front mount Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216378