

Data Sheet for Article: MM216853--

Knob switch, 2 pos. 40° spring-return, `I/O`, rotary head

Make-up Rotary knob, Version spring-return, 0-I, Illumination No, Colour Black/light gray, IP Rating IP66, Series MM




Technical Data

Series	MM
Version	spring-return 0-I
Handle type	Drehknopf
Illumination	No
Colour	Black/light gray
Make-up	Rotary knob
IP Rating	IP66
Necessary Accessories	MM216374--;MM216376--;MM216378--
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Tightening torque (Nm)	0,30

Technical Data - continued

Lifespan, mechanical	100000 Operations
Operating frequency	< 2000 Operations
Mounting position	any
Type No.	M22-W

Maßbild

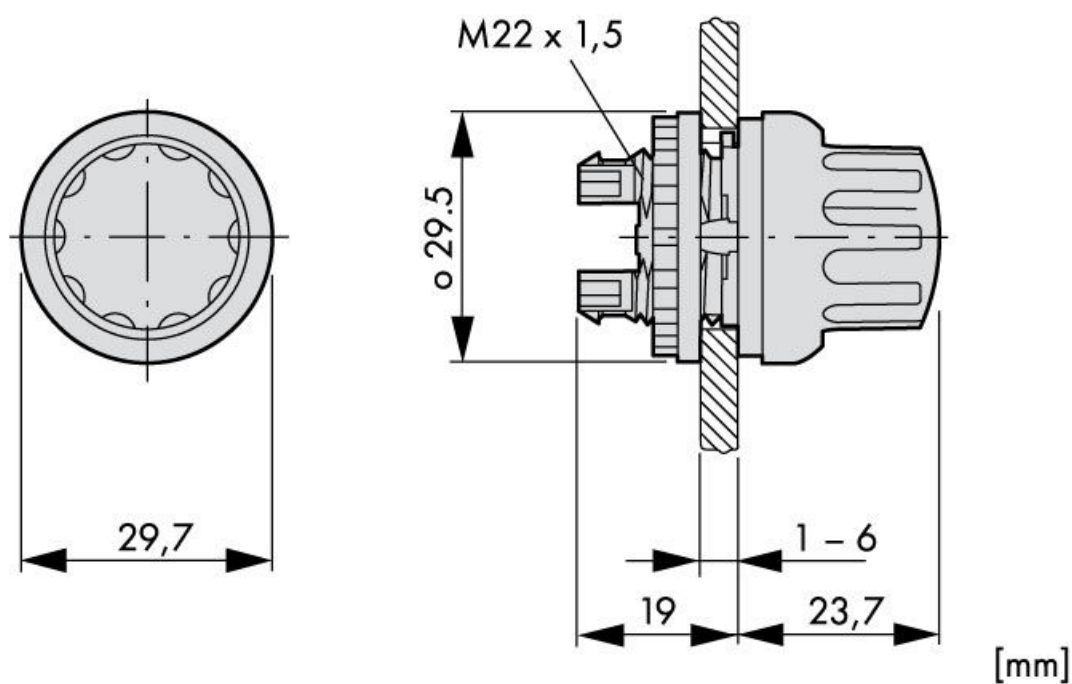

Article Table

DESCRIPTION	Order No.
Knob switch, 2 pos. 40° spring-return, `I/O`, rotary head	MM216853
Make-up Rotary knob, Version spring-return,0-I, Illumination No, Colour Black/light gray, IP Rating IP66, Series MM	
Necessary Accessories	
Adapter (front)	MM216374
Make-up Mounting adapter, Illumination No, Colour Black, Series MM	
NO contact block front mount	MM216376
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	
NC contact block front mount	MM216378
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	