

Data Sheet for Article: MM216971--

Illuminated Push-button, extended, spring-return, yellow

Make-up illuminated pushbutton, Version high, spring-return, Illumination for passive illumination, Colour Yellow, IP Rating IP67, IP69K, Series MM




Technical Data

Series	MM
Version	high spring-return
Illumination	for passive illumination
Colour	Yellow
Make-up	illuminated pushbutton
IP Rating	IP69K IP67
Necessary Accessories	MM216374--;MM216376--;MM216378--
shock resistance	30G
Ambient temperature Open (°C)	-25°C...+70°C
Climatic proofing	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Standard	IEC EN 60947 VDE 0660
Actuating force (N)	5

Technical Data - continued

Lifespan, mechanical	5000000 Operations
Operating frequency	< 3600 Operations
Mounting position	any
Type No.	M22-DLH-Y

Maßbild

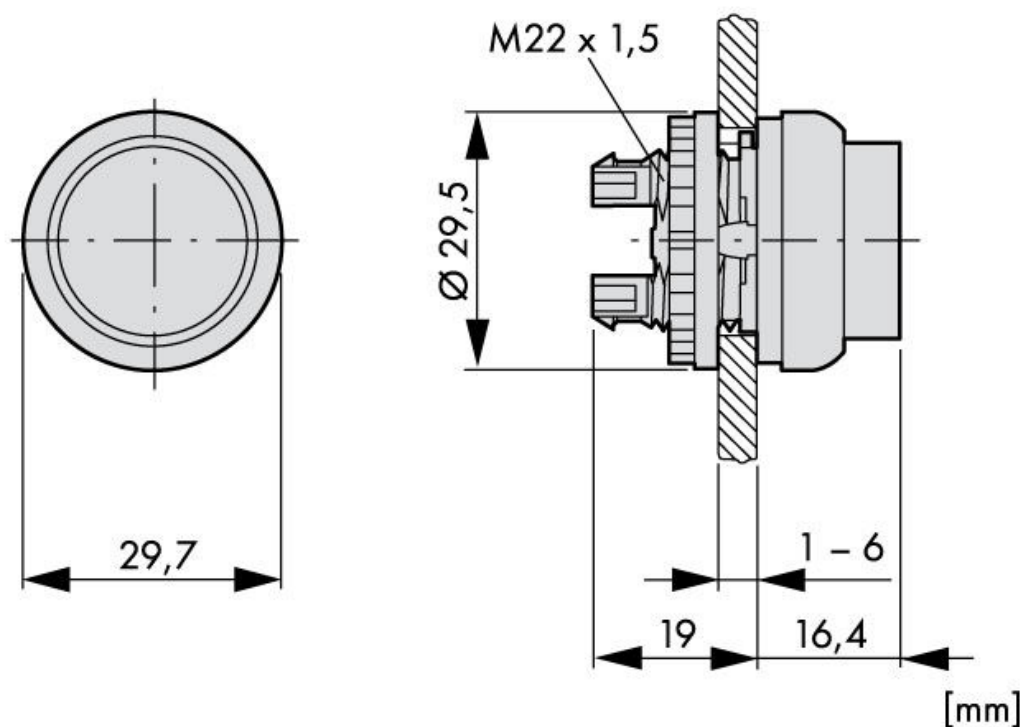

Article Table

DESCRIPTION	Order No.
Illuminated Push-button, extended, spring-return, yellow	
Make-up illuminated pushbutton, Version high, spring-return, Illumination for passive illumination, Colour Yellow, IP Rating IP67, IP69K, Series MM	MM216971
Necessary Accessories	
Adapter (front)	
Make-up Mounting adapter, Illumination No, Colour Black, Series MM	MM216374
NO contact block front mount	
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216376
NC contact block front mount	
Make-up Contacts, Version Screw terminal, Illumination No, IP Rating IP20, Series MM	MM216378