


Emergency luminaire Al anthracite LED, ceiling recessed

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in switch box Ø68mm

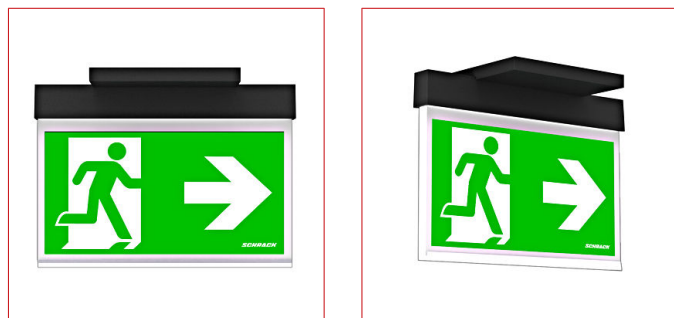


Technical Data

Net length (mm)	167,00
Net width (mm)	92,00
Net height (mm)	159,00
Net weight (kg)	0,80
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	edge luminaire
Design	Al
Colour	RAL 7016 (anthracite)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	15
Illuminant	LED (1.5W)
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,25
Power non-maintained mode (W)	0,70
Power max. (W)	2,25
IP Rating	IP40
Impact Resistance	≥ IK03
Mounting	recessed mounting ceiling

Technical Data - continued

Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

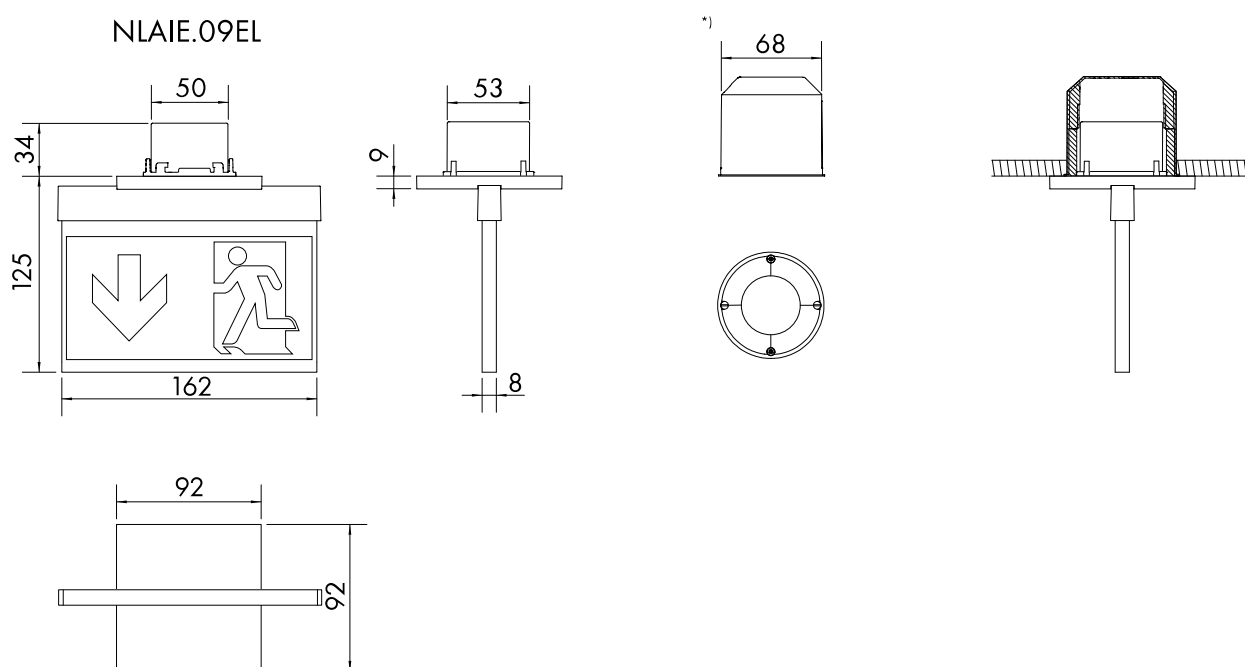

DESCRIPTION	Order No.
Emergency luminaire Al anthracite LED, ceiling recessed	
Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in NLAI.EA09EL switch box Ø68mm	