


Emergency luminaire AI anthracite, LED, wall recessed

Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in switch box Ø68mm

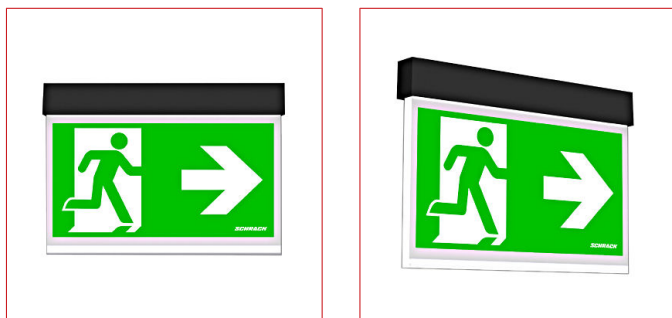

Technical Data


Net length (mm)	167,00
Net width (mm)	57,00
Net height (mm)	118,00
Net weight (kg)	0,80
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	edge luminaire
Design	AI
Colour	RAL 7016 (anthracite)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	15
Illuminant	LED (1.5W)
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,25
Power non-maintained mode (W)	0,70
Power max. (W)	2,25
IP Rating	IP40
Impact Resistance	≥ IK03
Mounting	recessed wall mounting

Technical Data - continued

Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLAIR.09EL

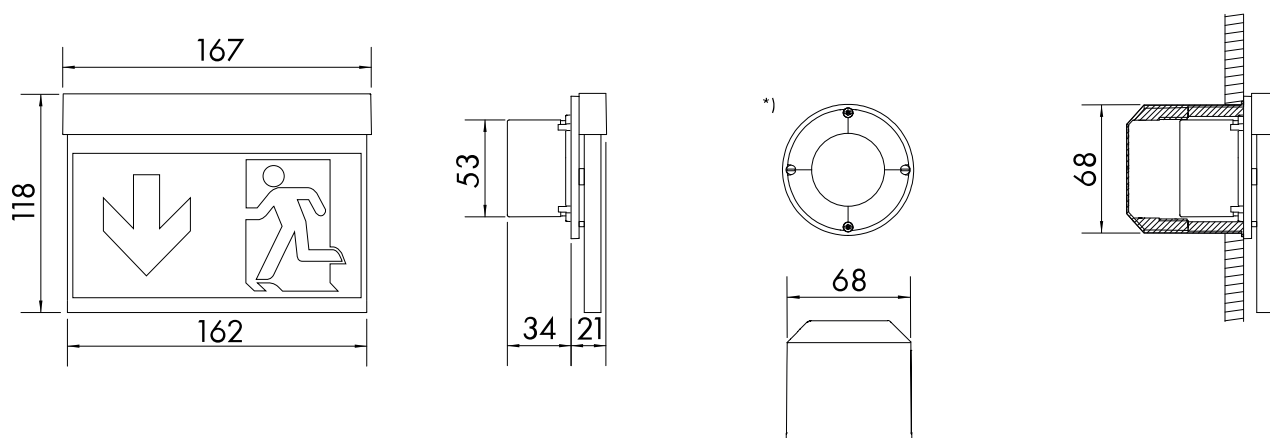

DESCRIPTION	Order No.
Emergency luminaire Al anthracite, LED, wall recessed	
Centrally switchable, with single lamp supervision, Viewing distance: 15m, 230V AC/DC, recessed mounting with adapter frame in NLAIRA09EL switch box Ø68mm	