

Data Sheet for Article: NLDOE029EL

Emergency luminaire DO 1x1W ERT-LED 230V recessed mounting

with supervision - centrally switchable, 140lm



Technical Data

Net length (mm)	53,00
Net width (mm)	26,00
Net height (mm)	30,00
Net weight (kg)	0,40
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	Plastic luminaire
Design	DO
Halogen-free	Housing made of halogen-free plastic
Colour	Transparent
Illuminant	ERT-LED (1W)
Lumen	140
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	2,80
Power non-maintained mode (W)	1,10
Power max. (W)	2,80
IP Rating	IP20
Mounting	recessed mounting ceiling
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4


Technical Data - continued

Manufacturer

Schrack

Dimensions (mm)

NLDOE...

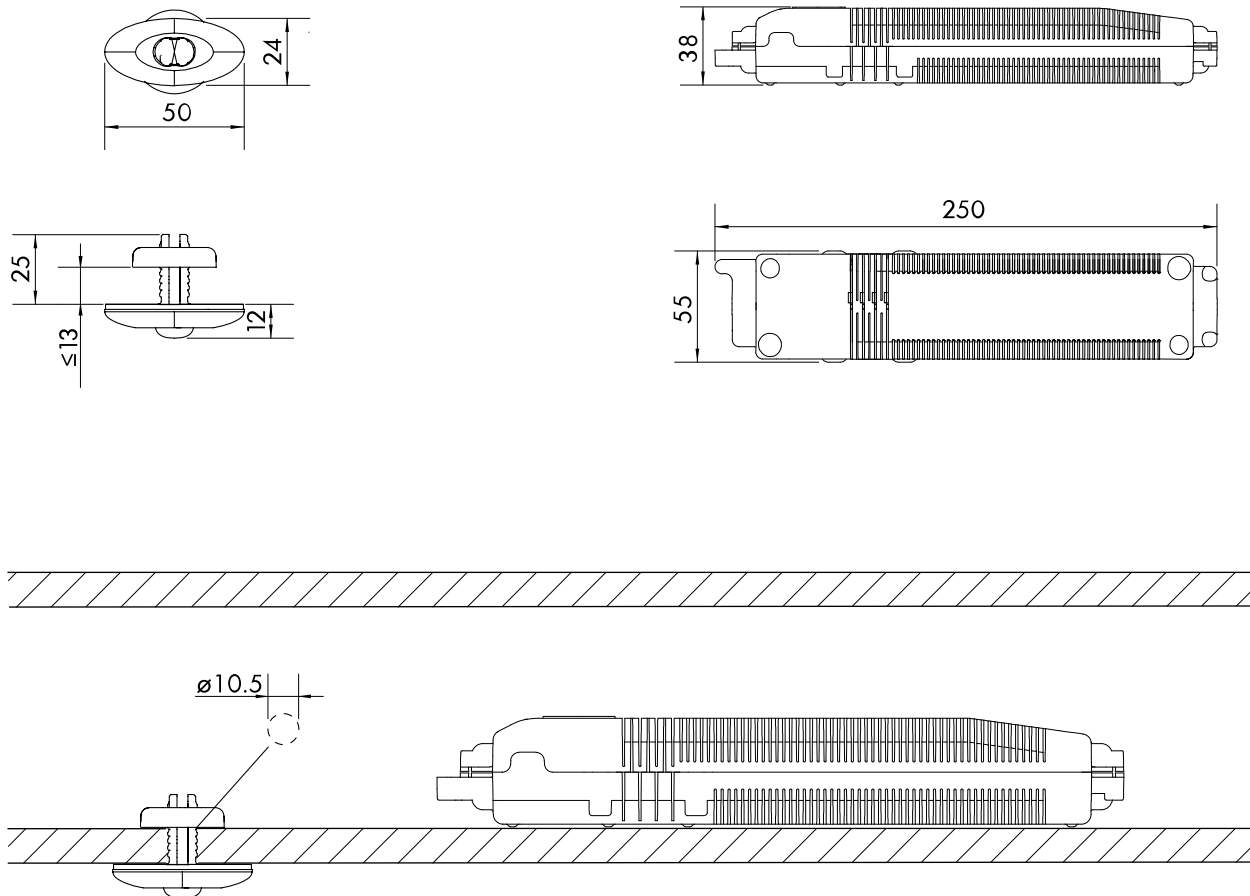

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,54	3,73	7,11	10,71	4,69
2,50	1,68	4,16	8,18	12,46	5,31
3,00	1,74	4,49	8,99	13,91	5,58
3,50	1,71	4,74	9,38	15,11	5,32
4,00	1,60	4,89	9,00	15,81	4,27
5,00	0,86	4,84	7,15	14,82	1,80

DESCRIPTION	Order No.
Emergency luminaire DO 1x1W ERT-LED 230V recessed mounting with supervision - centrally switchable, 140lm	NLDOE029EL