

Data Sheet for Article: NLFLU030EL

Emergency luminaire FLU 30W LED 230V AC/DC EL floodlight

Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (NLMU06BOX) - centrally switchable, 5116lm





Technical Data

Net length (mm)	198,00
Net height (mm)	183,00
Netto depth (mm)	37,00
Net weight (kg)	4,70
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	FLU
Colour	RAL 7016 (anthracite)
Illuminant	LED (30W)
Lumen	5116
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%

Technical Data - continued

Power maintained mode (W)	31,50
Power non-maintained mode (W)	1,50
Power max. (W)	31,50
IP Rating	IP66
Impact Resistance	IK08
Mounting	surface mounting wall
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	38
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

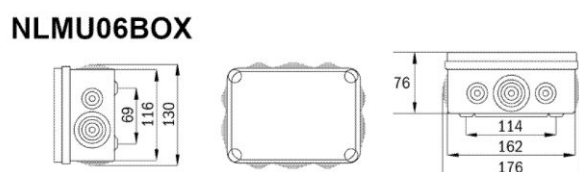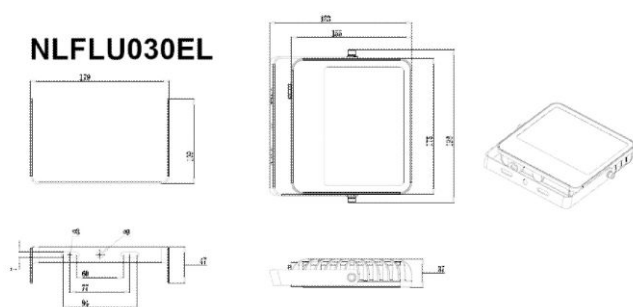

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,73	5,7	5,7	5,7	2,73
2,50	3,42	7,12	7,12	7,12	3,42
3,00	4,1	8,55	8,55	8,55	4,1
3,50	4,79	9,97	9,97	9,97	4,79
4,00	5,47	11,4	11,4	11,4	5,47
5,00	6,84	14,25	14,25	14,25	6,84
6,00	8,21	17,1	17,1	17,1	8,21
7,00	9,58	19,95	19,95	19,95	9,58
8,00	10,74	22,53	22,53	22,53	10,74
9,00	11,81	25,01	25,01	25,01	11,81
10,00	12,83	27,4	27,4	27,4	12,83
12,00	14,69	31,89	31,89	31,89	14,69
14,00	16,36	36,03	36,03	36,03	16,36
16,00	17,9	39,83	39,83	39,83	17,9

DESCRIPTION	Order No.
Emergency luminaire FLU 30W LED 230V AC/DC EL floodlight	NLFLU030EL
Zinc die-cast, colour anthracite, IP66, -25° up to 38°C, with supervision (NLMU06BOX) - centrally switchable, 5116lm	