

Технічний паспорт статті: NLILD1423S

Emergency luminaire IL Autotest 1x3W ERT-LED 3h 230V AC

White, surface ceiling mounting, LiFePO₄ battery, emergency luminaire with exchangeable lenses for illuminating escape routes or round surfaces, suitable for maintained and non-maintained operation, 250lm



Технічні дані


Чиста сума (mm)	36,00
Діаметр нетто (mm)	99,00
Вага нетто (kg)	0,25
Тип світла	Запобіжний індикатор
EB-ZB	Аварійний світильник на одну батарею
функція	Самоконтроль
виконання	пластикове світло
дизайн	Іллінойс
Без галогенів	Корпус виготовлений з безгалогенного пластику
Колір	RAL 9003 (білий)
лампочки	ERT-LED (3 Вт)
Люмен	250

Технічні дані - Fortsetzung


діапазон напруги (V)	230 В змінного струму 50 Гц $\pm 20\%$
Безперервна робота (W)	1,90
Схема резервного живлення (W)	0,20
Максимальна продуктивність (W)	3
Акумулятор (В/Аг)	3.2/3.3 LiFePO4
Клас захисту	IP40
Стійкість до ударів	$\geq IK03$
Асамблея	Подовження стелі Монтаж на стелю необов'язковий
Мінімальна температура навколишнього середовища ($^{\circ}\text{C}$)	-5
Максимальна температура навколишнього середовища ($^{\circ}\text{C}$)	30
Клас АА Е 8101	АА4
Виробник	Schrack

Dimensions (mm)


NLILD...

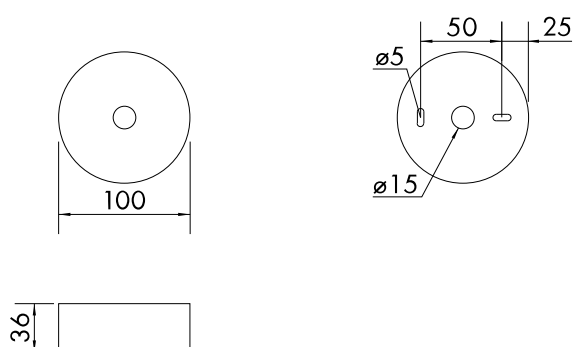



Dimensions (mm)

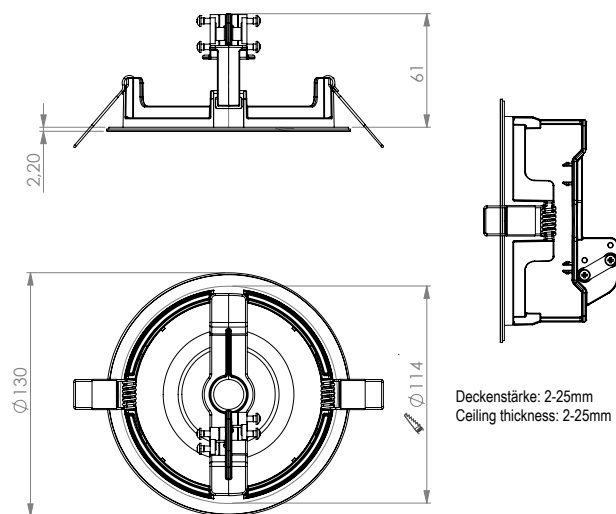


Dimensions (mm)

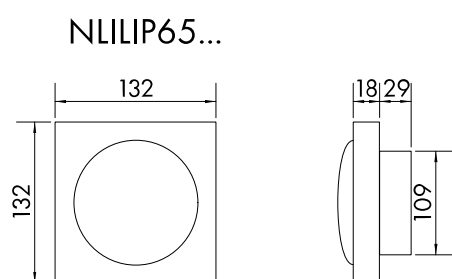

Dimensions (mm)

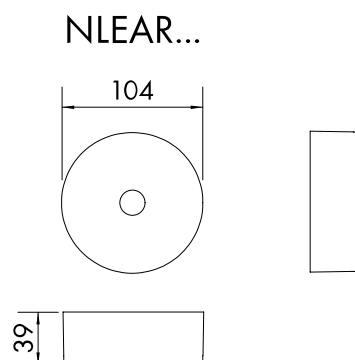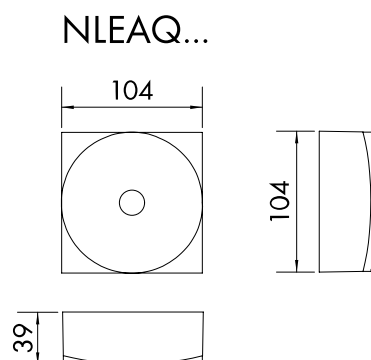

Wall illumination 5 lux for safety devices with optional beam lens (NLLSYSB4)
- Maintenance factor 0.8 - 1h/3h

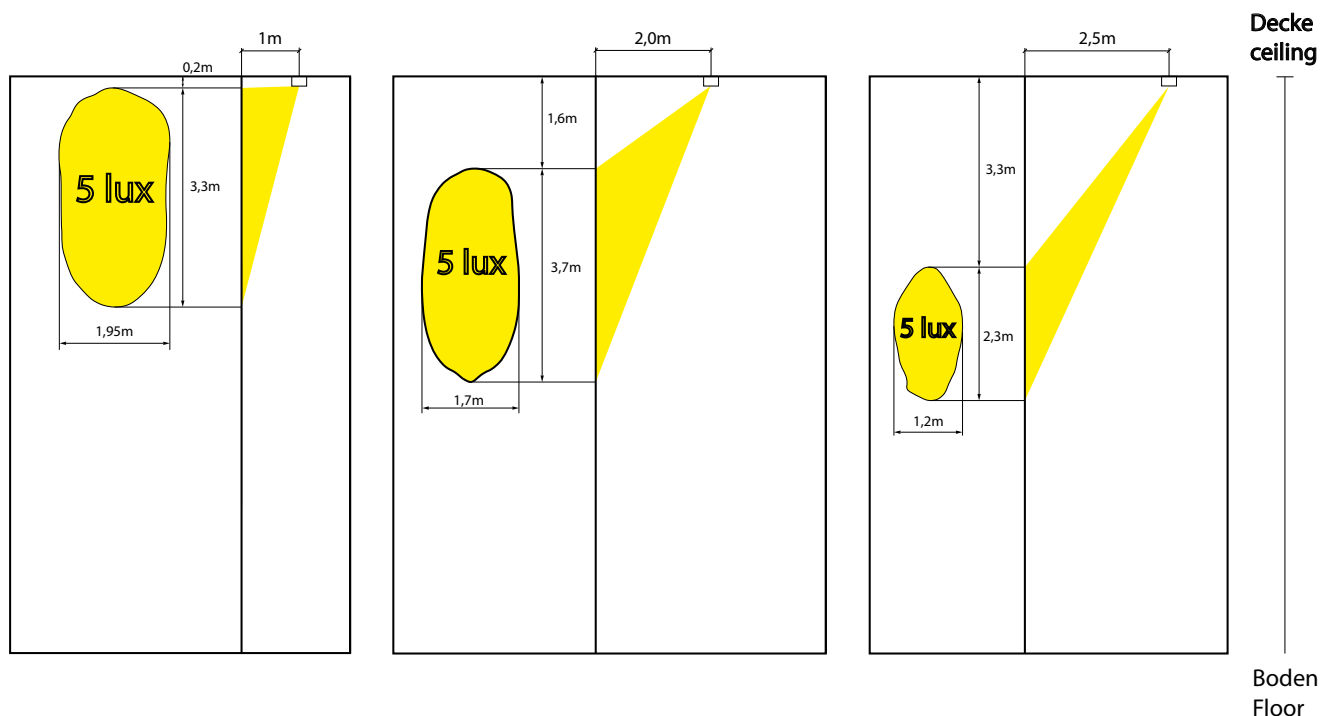

Spacing table with corridor lens (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	2,45	6,67	10,92	15,17	6,67
2,50	2,50	6,89	12,22	17,50	7,71
3,00	2,45	7,10	13,48	19,76	8,56
3,50	2,35	7,18	14,50	21,83	9,28
4,00	2,40	7,15	15,32	23,59	9,89
5,00	2,06	7,10	12,19	22,97	2,87

Spacing table with round lens (included in scope of delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,96	8,47	8,47	8,47	3,96
2,50	4,74	10,16	10,16	10,16	4,74
3,00	5,34	11,81	11,81	11,81	5,34
3,50	5,60	13,34	13,34	13,34	5,60
4,00	1,88	12,07	12,07	12,07	1,88

Spacing table with spot lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,77	3,97	3,97	3,97	1,77
2,50	2,15	4,86	4,86	4,86	2,15
3,00	2,42	5,55	5,55	5,55	2,42
3,50	2,71	6,13	6,13	6,13	2,71
4,00	2,95	6,63	6,63	6,63	2,95
5,00	3,36	7,78	7,78	7,78	3,36
6,00	3,73	8,70	8,70	8,70	3,73
7,00	3,99	9,52	9,52	9,52	3,99
8,00	4,13	10,29	10,29	10,29	4,13
9,00	4,17	10,91	10,91	10,91	4,17
10,00	4,12	11,38	11,38	11,38	4,12
12,00	3,71	11,83	11,83	11,83	3,71
14,00	2,80	11,73	11,73	11,73	2,80

Spacing table with high corridor lens (must be ordered separately) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,68	4,18	7,30	10,25	4,41
2,50	1,85	4,75	8,28	11,83	4,99
3,00	1,55	5,09	9,09	13,22	5,47
3,50	1,50	5,14	9,72	14,38	5,86
4,00	1,49	4,97	10,14	15,35	6,19
5,00	1,66	4,30	10,51	16,99	6,63
6,00	1,78	4,30	10,80	18,26	6,80
7,00	1,82	4,69	11,06	19,13	6,80
8,00	1,88	4,96	11,07	19,55	6,66
9,00	1,86	5,08	10,89	19,70	6,38
10,00	1,76	5,19	10,75	19,64	5,87
12,00	1,36	5,32	9,72	18,94	4,27

Таблиця статей

ПОЗНАЧЕННЯ	НОМЕР АРТИКУЛА
Emergency luminaire IL Autotest 1x3W ERT-LED 3h 230V AC White, surface ceiling mounting, LiFePO4 battery, emergency luminaire with exchangeable lenses for illuminating escape routes or round surfaces, suitable for maintained and non-maintained operation, 250lm	NLILD423S
Додаткові аксесуари	
Recessed frame white for emergency luminaires NLILD.. Required ceiling cut out: diameter 114 mm	NLILDE
4 LED changeable lens: Spot area illumination for high rooms Suitable for emergency luminaires with changeable lens system	NLLSYSS4

Таблиця статей

ПОЗНАЧЕННЯ	НОМЕР АРТИКУЛА
Додаткові аксесуари	
4 LED changeable lenses: corridor illuminat. high rooms >4m Suitable for emergency luminaires with changeable lens system	NLLSYSH4
4 LED changeable lens: Beam-asymmetric illumination For illumination of safety equipment (e.g. first aid boxes, fire extinguishers, etc.), Suitable for emergency luminaires with changeable lens system	NLLSYSB4
Square plug over housing B1 for emergency luminaires NLILD..	NLILB1
Square plug over housing B2 for emergency luminaires NLILD..	NLILB2
Plug over housing white round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAR
Plug over housing anthracite round zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEARAZ
Plug over housing white square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQ
Plug over housing anthracite square zinc die cast Universal ceiling mounting cover for the luminaires NLILDR.. NLILDF.. or NLILDS	NLEAQAZ
Spacer plate white for NLILD.. for cable entry at the side	NLILDAPA2
Ball Protection basket for IL, KT, DAQ, DAR, S2 l x h x d: 200 x 200 x 90mm	NLBALL3
Surface mounted housing white IP65 for emerg. Lumin. NLILD Polycarbonate, with side cable entries	NLILIP65K
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
IP65 housing for IL ceiling mounted luminaires, white, IK10 Suitable for surface-mounted emergency ceiling lights NLILD..., including spacer plate, vandal-proof with shock resistance test according to IK10, ball impact resistant according to DIN 18032	NLILIK10W