

Emerg. lum. IL 1x3W ERT-LED8h 230VAC WirelessControl hallway


White, recessed ceiling mounting, Security luminaire to illuminate rescue path with luminaire distance 11,4m at mounting height 4m, central switching, 110lm



Technical Data

Net height (mm)	95,00
Net diameter (mm)	122,00
Net weight (kg)	0,30
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	IL
Halogen-free	Housing made of halogen-free plastic
Colour	White
Backup time (h)	8
Illuminant	ERT-LED (3W)
Lumen	110
Voltage range (V)	230V AC 50Hz ±20%
Battery (V/Ah)	4,8/2,0 NiMh
IP Rating	IP20
Mounting	recessed mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	30
AA Class E 8101	AA4

Dimensions NLILE... (mm)

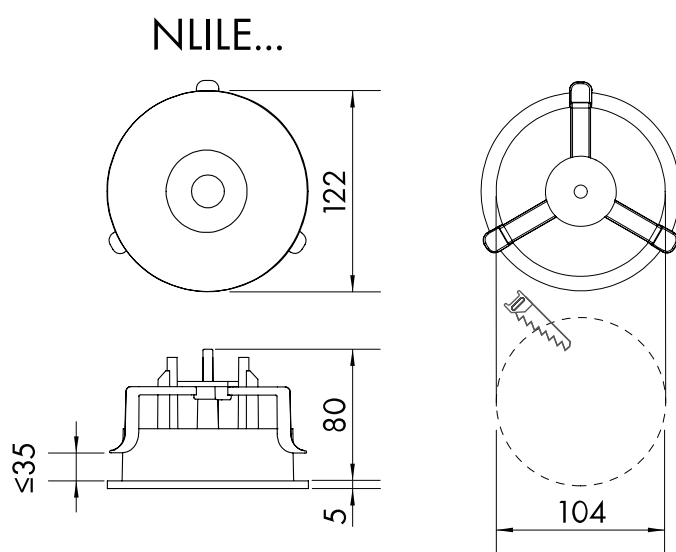

Article Table

DESCRIPTION	Order No.
Emerg. lum. IL 1x3W ERT-LED8h 230VAC WirelessControl hallway White, recessed ceiling mounting, Security luminaire to illuminate rescue path with luminaire distance 11,4m at mounting height 4m, central switching, 110lm	NLILEF028W
Optional Accessories	
Tool to easily open emergency luminaires Design IL recessed	NLILTOOL
HSS bimetal cylinder hole saw, d105mm, without shaft	GI63290105
Ball protection plexiglas lxwx d=190x190x62mm, for IL/EA Thickness 5mm, recommended for NLIL.. surface mounted	NLBALLPLX4
Ball Protection basket for IL, KT, DAQ, DAR, S2 l x h x d: 200 x 200 x 90mm	NLBALL3
Accu NiMH 4,8V 2,0Ah for self contained luminaires LED LPU or LEM module	NLAKKU4820