

Datenblatt für Artikel: NLKCWP403W

Emerg. luminaire KC WirelessControl LED 3h 230V AC

Exit sign: wall surface mounting, safety light: ceiling surface mounting, viewing distance: 30m, radio switchable, with LiFePO4 battery



Technische Daten


Net length (mm)	340,00
Net width (mm)	170,00
Net height (mm)	60,00
Net weight (kg)	0,90
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	KC
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010

Technische Daten - Fortsetzung


Viewing distance (m)	30
Backup time (h)	3
Illuminant	LED (3W)
Lumen	180
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	4,30
Power non-maintained mode (W)	0,70
Power max. (W)	5,30
Battery (V/Ah)	2x3,2/1,2 LiFePO4
IP Rating	IP54
Impact Resistance	IK06
Mounting	surface mounting wall
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

NLKCW...

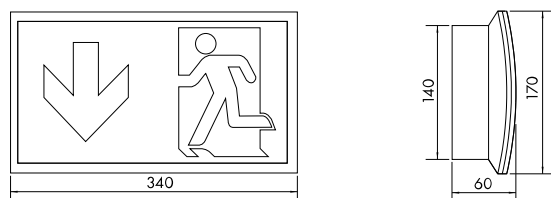

Dimensions (mm)

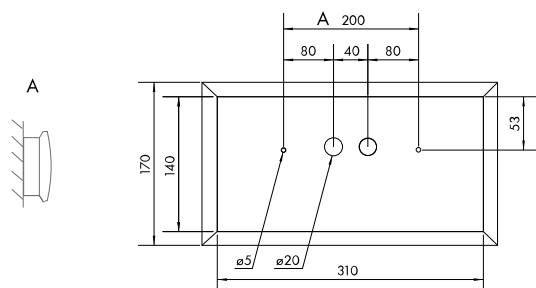

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	2,66	6,70	6,75	6,79	2,71
2,50	2,84	7,28	7,35	7,42	2,85
3,00	2,79	7,75	7,80	7,85	2,91
3,50	2,72	8,08	8,10	8,12	2,85
4,00	2,53	7,98	8,14	8,28	2,69
4,00	2,15	7,73	7,94	8,14	2,08

Artikeltabelle

BEZEICHNUNG	BEST.NR.
Emerg. luminaire KC WirelessControl LED 3h 230V AC	
Exit sign: wall surface mounting, safety light: ceiling surface mounting, viewing distance: 30m, radio switchable, with LiFePO4 battery	NLKCWP403W
Optional Accessories	
Rain cover for emergency luminaires Design KC plexiglass	NLKCRD
Concrete Plaster Box for Emergency luminaires Design KC	NLKCBERO
Recessed Frame for Emergency luminaires Design KC	NLKCER00
Required ceiling cut out: 320 x 150 mm	
IP65 Sealing for (NLKCW..)	NLKCIP65
Clear cover with hanging pictogram vd 24m for NLKCW..	NLKCH
Transparent Cover for Emergency luminaire Design KC	NLKCPR
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO	NLAKKU321L
LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	
Ball Protection for KC, KB+KBG, KX, PF, LX, C2	NLBALL2
Plug-pictogram left top for Design KC	NLKCPIKTLO
viewing distance: 30m	
Plug-pictogram left bottom for Design KC	NLKCPIKTLU
viewing distance: 30m	
Plug-pictogram right top for Design KC	NLKCPIKTRO
viewing distance: 30m	
Plug-pictogram right bottom for Design KC	NLKCPIKTRU
viewing distance: 30m	
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV