

Data Sheet for Article: NLKDU403SC

Self-contained luminaire KD self-contr.LED 3h 230V AC

Universal mounting, 1 h/3h adjustable, viewing distance: 22m, 1 h: 300lm; 3h: 150lm, LiFePO4 battery



Technical Data


Net length (mm)	260,00
Net width (mm)	70,00
Net height (mm)	155,00
Net weight (kg)	0,70
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KD
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010

Technical Data - continued


Viewing distance (m)	22
Illuminant	LED (3W)
Lumen	1h: 300;3h: 150
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	0,90
Power max. (W)	4,20
Battery (V/Ah)	2x3,2/1,2 LiFePO4
IP Rating	IP54
Impact Resistance	IK03
Mounting	surface mounting ceiling surface mounting wall universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)



NLKDU...

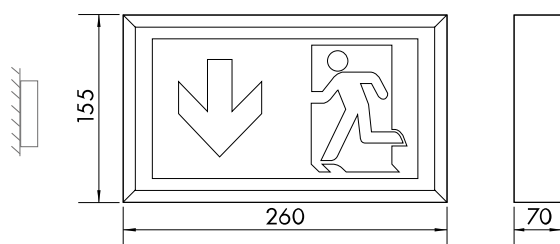

NLKDU...

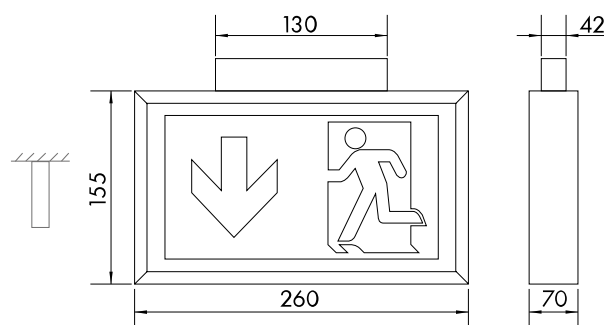

Drilling distances (mm)

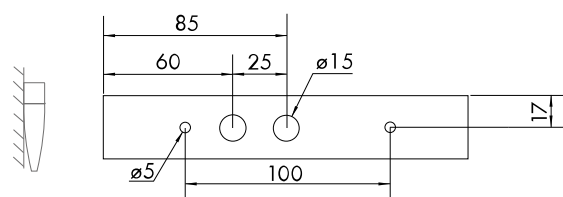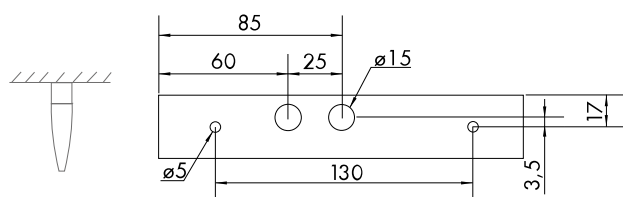

Article Table

DESCRIPTION	Order No.
Self-contained luminaire KD self-contr.LED 3h 230V AC	NLKDU403SC
Universal mounting, 1h/3h adjustable, viewing distance: 22m, 1h: 300lm; 3h: 150lm, LiFePO4 battery	
Optional Accessories	
Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO	NLAKKU321L
LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	
Pendant 500 mm silver, prewired	NL2DS
Design-pendant pair 500 mm white, prewired	NL2DW
Pendant pair 500 mm white, prewired	NL2PW
Ball Protection for KD, KM, KS,LM, VM, RI, RM	NLBALL1
l x h x d: 320 x 220 x 120mm	
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV