

Data Sheet for Article: NLKMBS403B

Emergency luminaire KMB WirelessConnect LED 3h 230V AC, black

Universal mounting, with LiFePO₄ battery, emergency luminaire for illuminating escape routes, with Bluetooth communication., 190lm



Technical Data



Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	50,00
Net weight (kg)	0,29
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessConnect
Version	Plastic luminaire
Design	KMB
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9005 (black)
Backup time (h)	3
Illuminant	LED (2W)

Technical Data - continued




Lumen	190
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Battery (V/Ah)	3,2/3,3 LiFePO4
IP Rating	IP54
Impact Resistance	$\geq$ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Abmessungen (mm)

NLKMB...

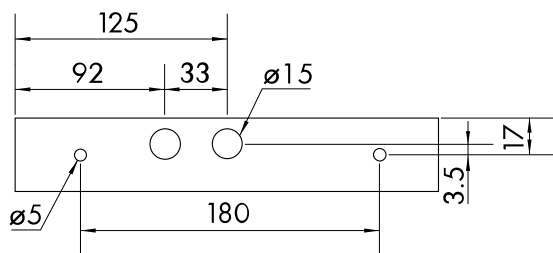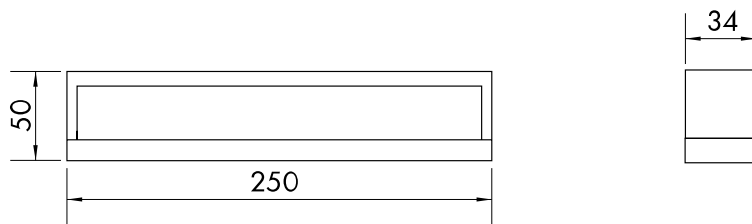

NLKME

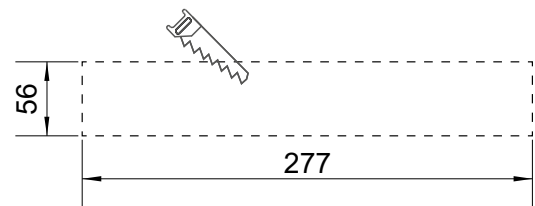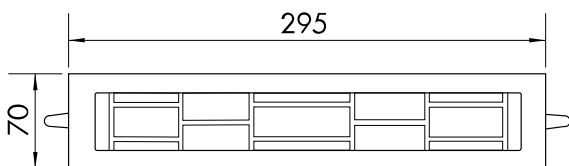

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Article Table

DESCRIPTION	Order No.
Emergency luminaire KMB WirelessConnect LED 3h 230V AC,black Universal mounting, with LiFePO4 battery, emergency luminaire for illuminating escape routes, with Bluetooth communication., 190lm	NLKMBS403B
Optional Accessories	
Recessed frame black for CPS luminaires Design KM,KMB,KS Required ceiling cut out: 277 x 56 mm	NLKMES
Accu LiFePO4 3,2V 3,3Ah for LED luminaire For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4