

Data Sheet for Article: NLKMBS509C

Emergency luminaire KMB 4x0,5W LED CC24 24V, black

Universal mounting, with supervision - centrally switchable, 220lm



Technical Data


Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	50,00
Net weight (kg)	0,30
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	Plastic luminaire
Design	KMB
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9005 (black)
Illuminant	LED (2W)
Lumen	220
Voltage range (V)	24V AC

Technical Data - continued


Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
IP Rating	IP54
Impact Resistance	≥ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-30
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

NLKMB...

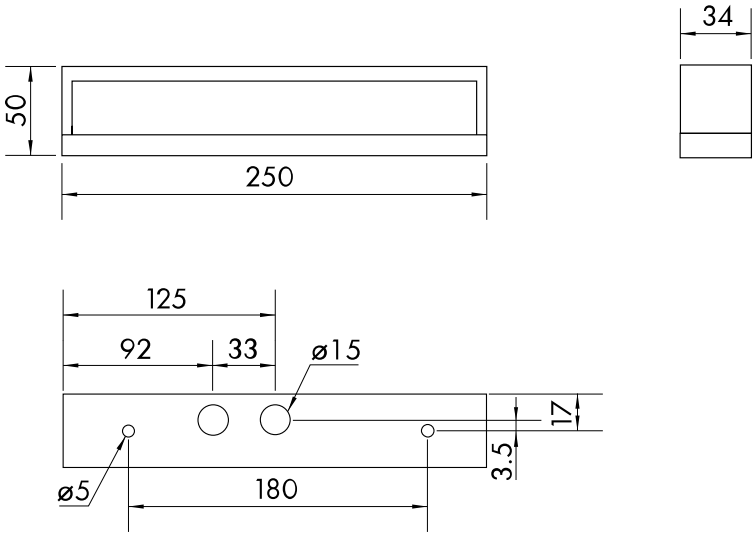

NLKME

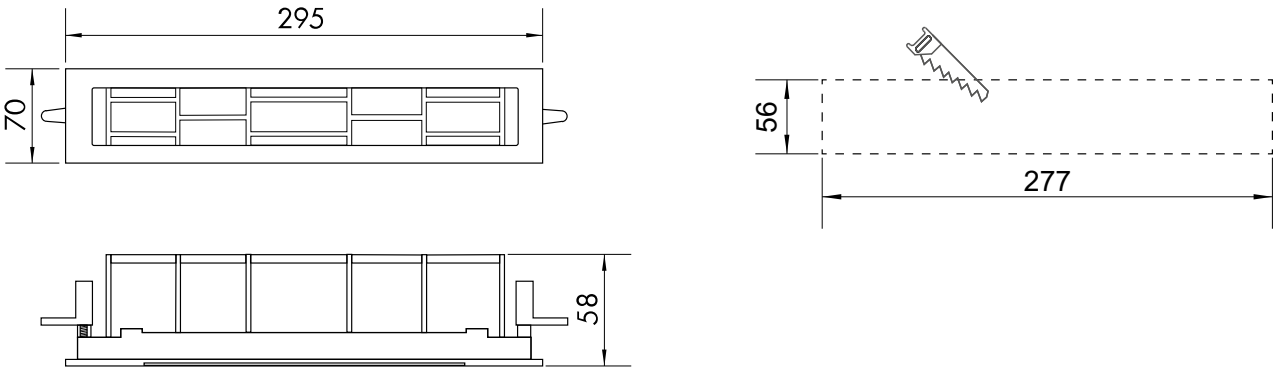

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	1,71	4,49	7,65	10,87	4,60
2,50	1,67	4,87	8,54	12,31	5,17
3,00	1,71	4,89	9,23	13,57	5,65
3,50	1,69	4,74	9,68	14,68	6,08
4,00	1,65	4,84	10,20	15,69	6,28
5,00	1,32	4,77	7,59	14,68	3,10

Article Table

DESCRIPTION	Order No.
Emergency luminaire KMB 4x0,5W LED CC24 24V, black	NLKMBS509C
Universal mounting, with supervision - centrally switchable, 220lm	
Optional Accessories	
Recessed frame black for CPS luminaires Design KM,KMB,KS	NLKMES
Required ceiling cut out: 277 x 56 mm	
Concrete plaster box f. emergency luminaire Design KMB,KS,KM	NLKMBE
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Design pair of pendants 500 mm white, wired	NL2DWKMKS
Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4