

Data Sheet for Article: NLKMBT403S

Emergency luminaire KMB Autotest LED 3h 230V AC TT, white

White, universal mounting, with 4x0,5W HP-LED, emergency luminaire for illuminating escape routes, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm, LiFePO4 battery suitable for low temperatures -25° to 40°C



Technical Data



Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	50,00
Net weight (kg)	0,29
Luminaire type	safety luminaire
Self contained - central battery	Self contained luminaire
Function	SelfControl Low Temperature
Version	Plastic luminaire
Design	KMB
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Backup time (h)	3

Technical Data - continued




Illuminant	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Battery (V/Ah)	3,2V/3,3Ah LiFePO4-TT
IP Rating	IP54
Impact Resistance	$\geq$ IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-25
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4
Manufacturer	Schrack

Abmessungen (mm)

NLKMB...

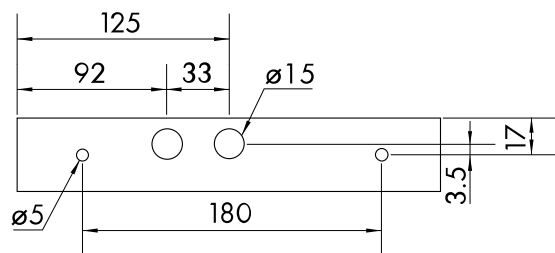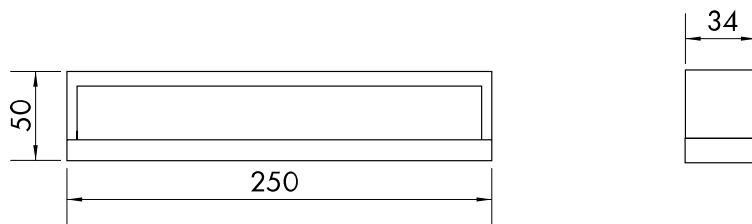

NLKME

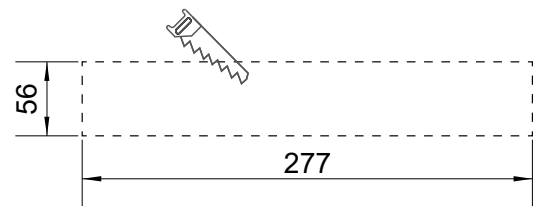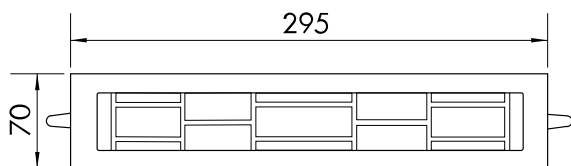

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	1,66	4,42	7,55	10,74	4,54
2,50	1,64	4,76	8,42	12,16	5,10
3,00	1,67	4,74	9,08	13,39	5,57
3,50	1,63	4,65	9,52	14,49	5,97
4,00	1,59	4,72	10,03	15,48	3,78
5,00	1,19	4,62	7,33	14,22	2,89

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

					
2,00	1,11	3,14	5,98	8,83	3,65
2,50	1,08	3,14	6,47	9,90	3,95
3,00	0,98	3,16	5,15	9,46	2,11
3,50	0,66	3,08	4,70	9,30	1,44

Article Table

DESCRIPTION	Order No.
Emergency luminaire KMB Autotest LED 3h 230V AC TT, white	
White, universal mounting, with 4x0,5W HP-LED, emergency luminaire for illuminating escape routes, 1h/3h/8h adjustable, 1h: 190lm; 3h: 190lm; 8h: 85lm, LiFePO4 battery suitable for low temperatures -25° to 40°C	NLKMBT403S
Optional Accessories	
Recessed frame white for CPS emergency luminaires KM,KMB,KS	NLKME
Required ceiling cut out: 277 x 56 mm	
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Accu LiFePO4 3.2V 3.3Ah low temp for LED luminaires	
LiFePO4 - Lithium-iron-phosphate battery suitable for low temperatures, UN3480 - LITHIUM-ION BATTERIES, The permissible ambient luminaire temperatures are specified for the low temperature luminaires	NLAKKU323T
Design pair of pendants 500 mm white, wired	NL2DWKMKS
Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4