

Data Sheet for Article: NLKMUS403S

Emergency luminaire KM Autotest LED 3h 230V AC, black

Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, exit sign luminaire, viewing distance: 24m, 1h: 170lm; 3h: 170lm; 8h: 76lm



Technical Data


Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	174,00
Net weight (kg)	0,39
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	self controlled
Version	Plastic luminaire
Design	KM
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9005 (black)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010

Technical Data - continued


Viewing distance (m)	24
Backup time (h)	3
Illuminant	LED (2W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Battery (V/Ah)	3,2/3,0 LiFePO4
IP Rating	IP54
Impact Resistance	IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
Manufacturer	Schrack

Abmessungen (mm)


NLKM...

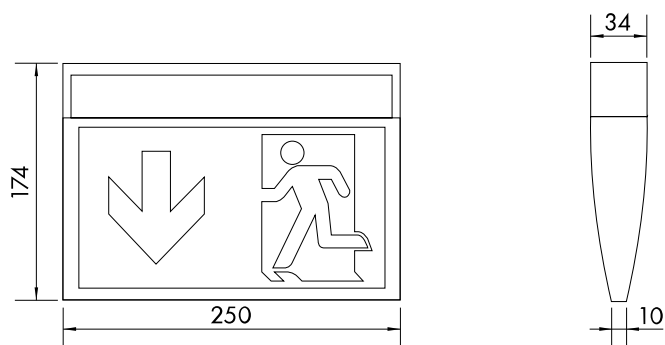

NLKME

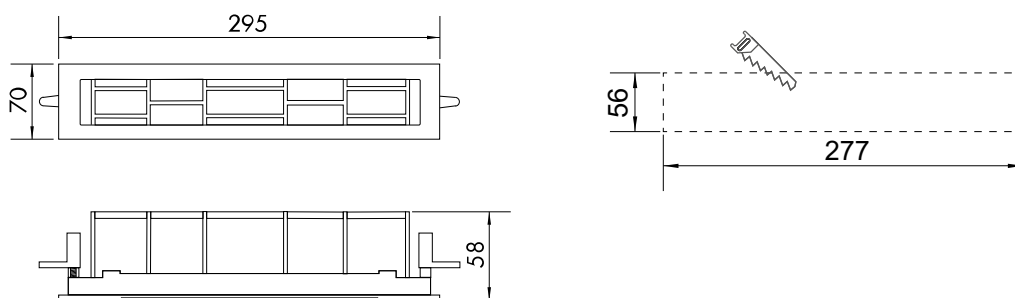

Bohrabstände (mm)

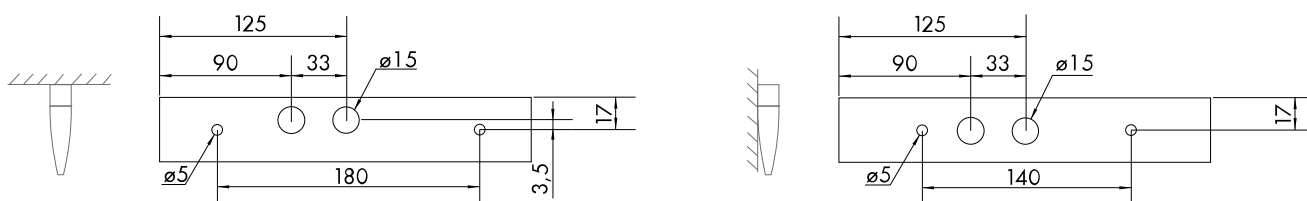

Article Table

DESCRIPTION	Order No.
Emergency luminaire KM Autotest LED 3h 230V AC, black	
Universal mounting, with 4x0,5W High Power LED, with LiFePO4 battery, 1h/3h/8h adjustable, exit sign luminaire, viewing distance: 24m, 1h: 170lm; 3h: 170lm; 8h: 76lm	NLKMUS403S
Optional Accessories	
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Accu LiFePO4 3,2V 3,3Ah for LED luminaire	
For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3233
Design pair of pendants 500 mm white, wired	
Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Ball Protection for KD, KM, KS,LM, VM, RI, RM	
l x h x d: 320 x 220 x 120mm	NLBALL1
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4