

Data Sheet for Article: NLKMUS509C

Emergency luminaire KM, 4x0,5W HP-LED, CC24, 24V, black

Universal mounting, with supervision - centrally switchable, viewing distance: 24m



Technical Data


Net length (mm)	250,00
Net width (mm)	34,00
Net height (mm)	174,00
Net weight (kg)	0,25
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	Plastic luminaire
Design	KM
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9005 (black)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Viewing distance (m)	24

Technical Data - continued


Illuminant	LED (2W)
Lumen	200
Voltage range (V)	24V AC
Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
IP Rating	IP54
Impact Resistance	IK03
Mounting	surface mounting ceiling surface mounting wall recessed mounting ceiling optional universal
Min. ambient temperature (°C)	-30
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)


NLKM...

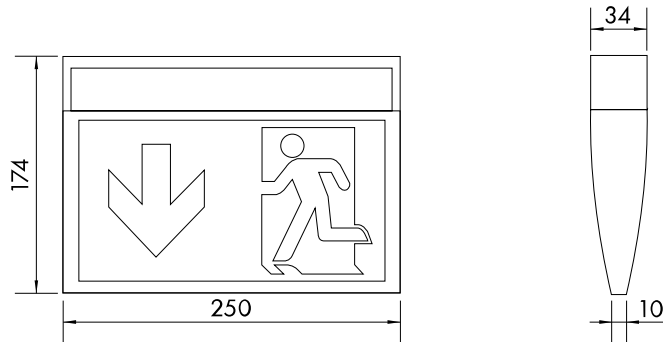

NLKME

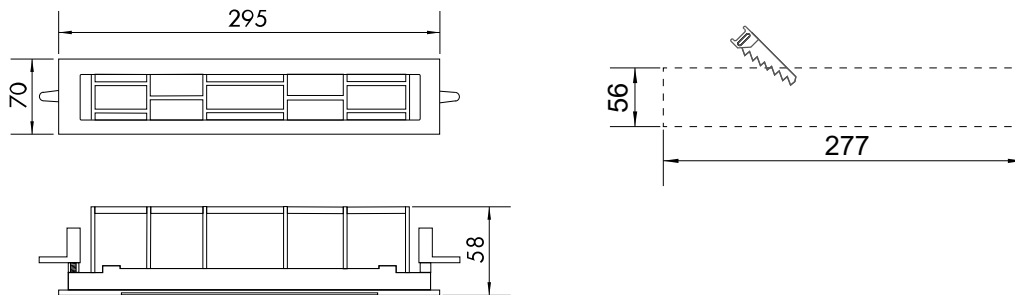

Drilling distances (mm)

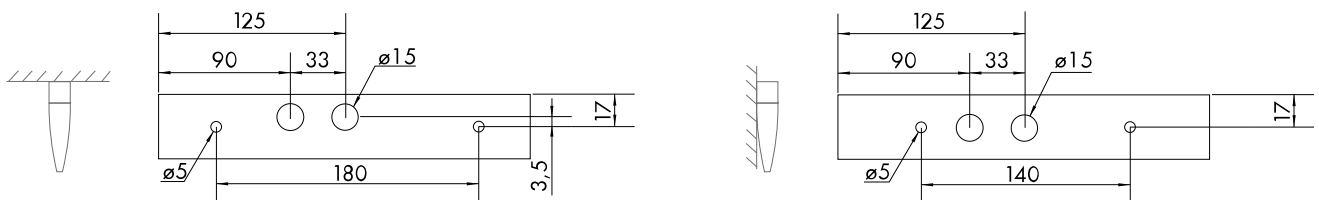

Article Table

DESCRIPTION	Order No.
Emergency luminaire KM, 4x0,5W HP-LED, CC24, 24V, black	NLKMUS509C
Universal mounting, with supervision - centrally switchable, viewing distance: 24m	
Optional Accessories	
Recessed frame black for CPS luminaires Design KM,KMB,KS	NLKMES
Required ceiling cut out: 277 x 56 mm	
Concrete plaster box f. emergency luminaire Design KMB,KS,KM	NLKMBE
Wall bracket white for luminaires Design KM/KS	NLAWKSU
Design pair of pendants 500 mm white, wired	NL2DWKMKS
Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	
Design cord suspension 2000mm, 1 pair	NLDSA000
Cord suspension 2000mm, 1 pair	NLCORD2
Cord suspension 4000mm, 1 pair	NLCORD4