

Data Sheet for Article: NLLMD403WL

# Emergency luminaire LM WL 6x0,5W LED 3h 230VAC ceiling moun.

Ceiling surface mounting, 3h autonomy time, viewing distance: 22m, LiFePO4 battery, radio switchable, WirelessControl Professional type




## Technical Data

|                                  |                                                                                              |
|----------------------------------|----------------------------------------------------------------------------------------------|
| Net length (mm)                  | 258,00                                                                                       |
| Net width (mm)                   | 62,00                                                                                        |
| Net height (mm)                  | 167,00                                                                                       |
| Net weight (kg)                  | 1,10                                                                                         |
| Luminaire type                   | emergency sign luminaire                                                                     |
| Self contained - central battery | Self contained luminaire                                                                     |
| Function                         | WirelessControl Professional                                                                 |
| Version                          | Aluminium profile luminaire                                                                  |
| Design                           | LM                                                                                           |
| Colour                           | Silver                                                                                       |
| Pictogram                        | Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010 |
| Viewing distance (m)             | 22                                                                                           |

## Technical Data - continued


|                               |                          |
|-------------------------------|--------------------------|
| Backup time (h)               | 3                        |
| Illuminant                    | LED (3W)                 |
| Voltage range (V)             | 230V AC 50Hz ±20%        |
| Power maintained mode (W)     | 3,50                     |
| Power non-maintained mode (W) | 0,80                     |
| Power max. (W)                | 4,70                     |
| Battery (V/Ah)                | 3,2/1,2 LiFePO4          |
| IP Rating                     | IP40                     |
| Impact Resistance             | IK03                     |
| Mounting                      | surface mounting ceiling |
| Min. ambient temperature (°C) | -5                       |
| Max. ambient temperature (°C) | 40                       |
| AA Class E 8101               | AA4                      |
| Manufacturer                  | Schrack                  |

## Dimensions (mm)

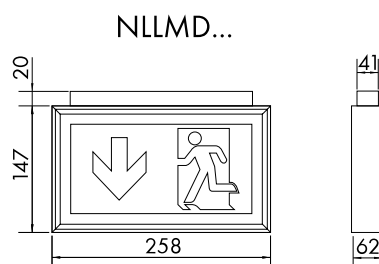

## Drilling distances (mm)

NLLM.../LX.../LS

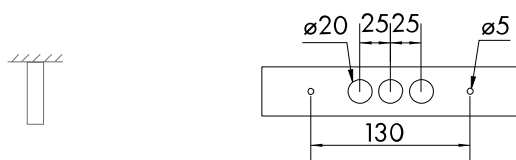

## Article Table

| DESCRIPTION                                                                                                           | Order No.  |
|-----------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire LM WL 6x0,5W LED 3h 230VAC ceiling moun.                                                          |            |
| Ceiling surface mounting, 3h autonomy time, viewing distance: 22m, LiFePO4 battery, radio switchable, WirelessControl | NLLMD403WL |
| Professional type                                                                                                     |            |
| <b>Optional Accessories</b>                                                                                           |            |
| Wall bracket white suitable for: RM, RI, LM, ASU, KT                                                                  | NLAWM001   |
| Set 2 accus LiFePO4 3,2V 1,2Ah f. WirelessControl lum. w.LEO                                                          | NLAKKU321L |
| LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries                                   |            |
|                                                                                                                       | NLTESTSC2  |
| Protective cover for test buttons NLTEST2---                                                                          | NLTEST2COV |