

Data Sheet for Article: NLMMDTW09E

Emergency luminaire MM Duo white, LED, ceiling surface

Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm




Technical Data

Net length (mm)	236,00
Net width (mm)	45,00
Net height (mm)	136,00
Net weight (kg)	1,15
Luminaire type	Combined rescue path and rescue sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	MM
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Viewing distance (m)	22

Technical Data - continued

Illuminant	LED (2W) ERT-LED (1W)
Lumen	140
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	3,50
Power non-maintained mode (W)	1,10
Power max. (W)	5,10
IP Rating	IP40
Impact Resistance	$\geq IK03$
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

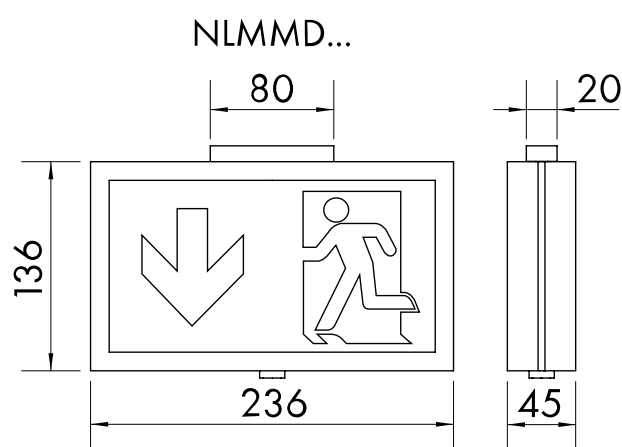

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	3,86	8,79	6,13	3,19	1,41
2,50	2,85	9,62	6,47	3,7	1,56
3,00	3,12	9,84	5,76	4,11	1,61
3,50	3,32	10,35	6,26	4,41	1,48
4,00	3,46	8,75	6,65	4,55	1,22

DESCRIPTION	Order No.
Emergency luminaire MM Duo white, LED, ceiling surface	
Centrally switchable, with single lamp supervision, viewing distance: 22m, 230V AC/DC, with additional LED spot for safety illumination in emergency mode, 140lm	NLMMDTW09E