

Data Sheet for Article: NLPMD403SC

# Emergency luminaire PM Autotest LED 3h

## 230V AC ceiling mount

1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class II, LiFePO4 battery




### Technical Data

|                                  |                                                                                                                                 |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Net length (mm)                  | 236,00                                                                                                                          |
| Net width (mm)                   | 136,00                                                                                                                          |
| Net height (mm)                  | 168,00                                                                                                                          |
| Net weight (kg)                  | 1,30                                                                                                                            |
| Luminaire type                   | emergency sign luminaire                                                                                                        |
| Self contained - central battery | Self contained luminaire                                                                                                        |
| Function                         | self controlled                                                                                                                 |
| Version                          | Plastic luminaire                                                                                                               |
| Design                           | PM                                                                                                                              |
| Halogen-free                     | Housing made of halogen-free plastic                                                                                            |
| Colour                           | White                                                                                                                           |
| Pictogram                        | Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010 |

## Technical Data - continued

|                               |                          |
|-------------------------------|--------------------------|
| Viewing distance (m)          | 20                       |
| Backup time (h)               | 1/3/8                    |
| Illuminant                    | LED (3W)                 |
| Voltage range (V)             | 230V AC 50Hz $\pm 20\%$  |
| Power maintained mode (W)     | 3,30                     |
| Power non-maintained mode (W) | 0,40                     |
| Power max. (W)                | 4,20                     |
| Battery (V/Ah)                | 2x 3,2V/1,6Ah LiFePO4    |
| IP Rating                     | IP65                     |
| Impact Resistance             | IK03                     |
| Mounting                      | surface mounting ceiling |
| Min. ambient temperature (°C) | -5                       |
| Max. ambient temperature (°C) | 40                       |
| AA Class E 8101               | AA4                      |
| Manufacturer                  | Schrack                  |

## Abmessungen (mm)

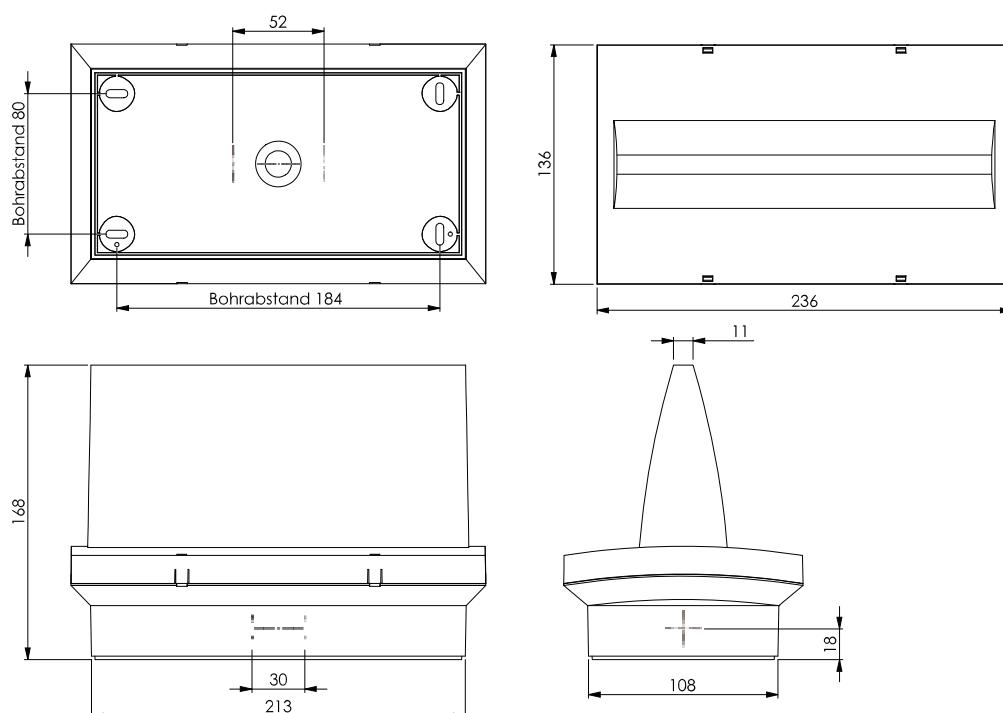

## Article Table

| DESCRIPTION                                                                                                                                                                                                                     | Order No.  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire PM Autotest LED 3h 230V AC ceiling mount<br>1h/3h/8h adjustable, ceiling surface mounting with pictograms on one or two sides, viewing distance: 20m, IP65, protection class NLPMD403SC II, LiFePO4 battery |            |
| <b>Optional Accessories</b>                                                                                                                                                                                                     |            |
| Recessed frame white for emergency luminaires design PM<br>Required ceiling cut out: 246 x 152 mm                                                                                                                               | NLPME      |
| Set 2 accus LiFePO4 3,2V 1,6Ah f. luminaires. w. LEO or LPK<br>LiFePO4 - Lithium-iron phosphate battery , UN3480 - UN 3480 : Lithium-Ion batteries                                                                              | NLAKKU3216 |
|                                                                                                                                                                                                                                 | NLTESTSC2  |
| Protective cover for test buttons NLTEST2---                                                                                                                                                                                    | NLTEST2COV |