

Data Sheet for Article: NLPMD408WL

Emerg. luminaire PM WirelessControl LED 8h 230V AC ceiling

ceiling surface mounting, viewing distance: 20m, radio switchable, with LiFePO4 battery




Technical Data

Net length (mm)	236,00
Net width (mm)	136,00
Net height (mm)	168,00
Net weight (kg)	1,00
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	PM
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Viewing distance (m)	20

Technical Data - continued

Backup time (h)	8
Illuminant	LED (3W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	2,90
Power non-maintained mode (W)	0,80
Power max. (W)	3,80
Battery (V/Ah)	2x3,2/3,3 LiFePO4
IP Rating	IP65
Impact Resistance	$\geq IK03$
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

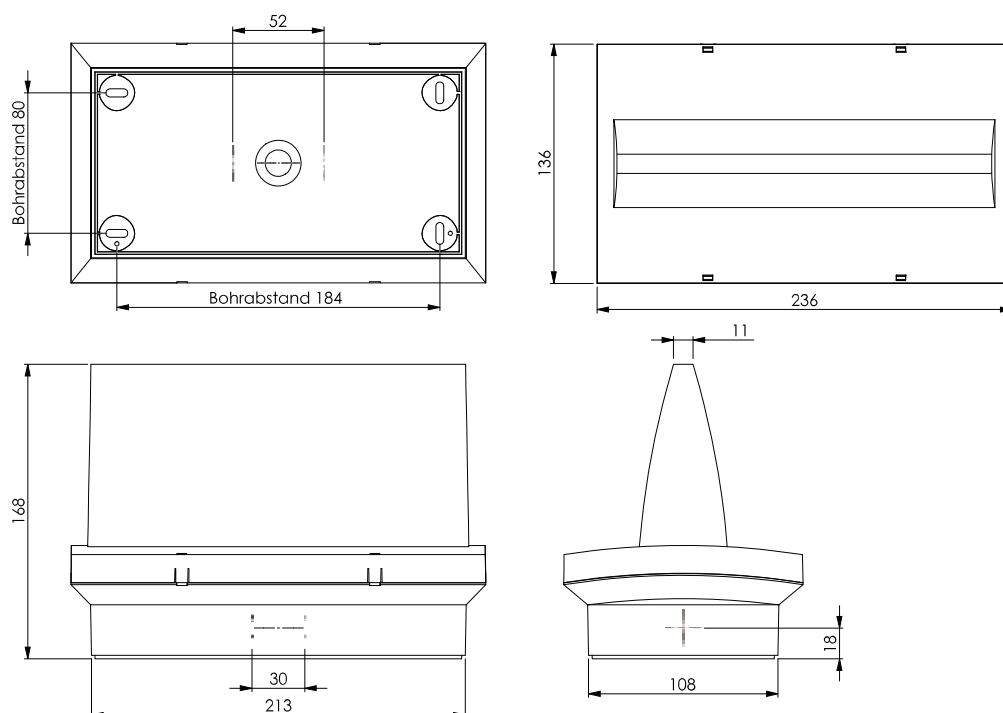

Article Table

DESCRIPTION	Order No.
Emerg. luminaire PM WirelessControl LED 8h 230V AC ceiling ceiling surface mounting, viewing distance: 20m, radio switchable, with LiFePO4 battery	NLPMD408WL
Optional Accessories	
Recessed frame white for emergency luminaires design PM Required ceiling cut out: 246 x 152 mm	NLPME
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphat battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV