

Data Sheet for Article: NLPMD509CC

Emergency luminaire PM HP-LED CC24 24V ceiling mounting

with supervision - centrally switchable, viewing distance: 20m




Technical Data

Net length (mm)	236,00
Net width (mm)	136,00
Net height (mm)	168,00
Net weight (kg)	0,70
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	Plastic luminaire
Design	PM
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Viewing distance (m)	20

Technical Data - continued

Illuminant	LED (3W)
Voltage range (V)	24V AC
Power maintained mode (W)	2,80
Power non-maintained mode (W)	0,40
Power max. (W)	2,80
IP Rating	IP65
Impact Resistance	IK03
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

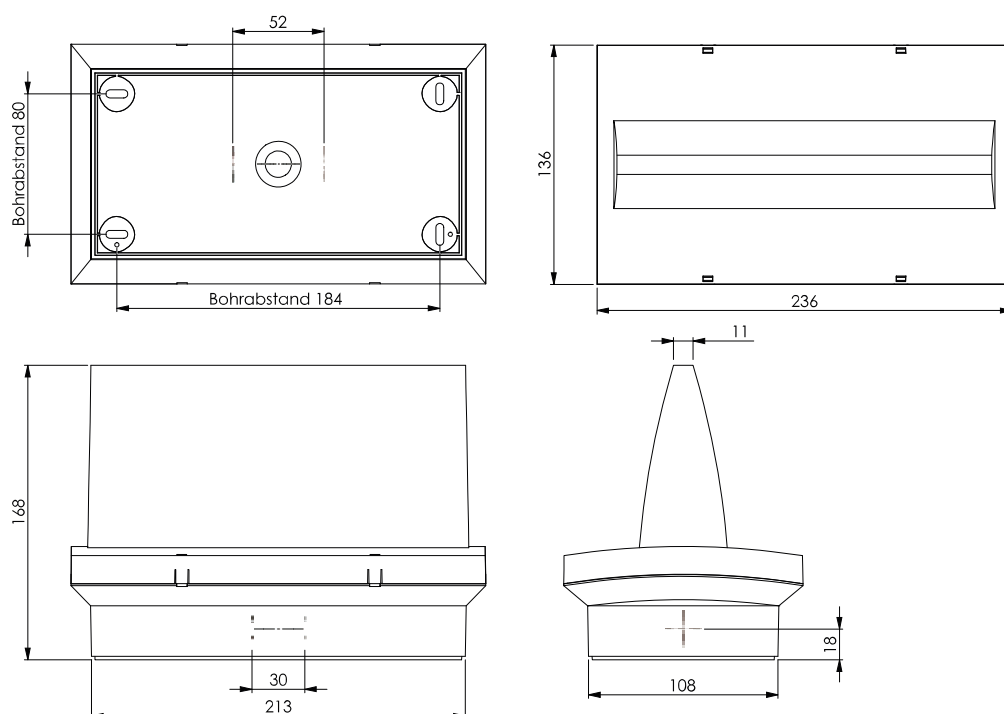

Article Table

DESCRIPTION	Order No.
Emergency luminaire PM HP-LED CC24 24V ceiling mounting with supervision - centrally switchable, viewing distance: 20m	NLPMD509CC
Optional Accessories	
Recessed frame white for emergency luminaires design PM Required ceiling cut out: 246 x 152 mm	NLPME