

Data Sheet for Article: NLPXD403WL

Emerg. luminaire PX Wireless HP-LED 3h 230V AC ceiling

viewing distance: 30m, with LiFePO4 battery, WirelessControl Professional type




Technical Data

Net length (mm)	339,00
Net width (mm)	73,00
Net height (mm)	211,00
Net weight (kg)	1,40
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	PX
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Viewing distance (m)	30

Technical Data - continued

Backup time (h)	3
Illuminant	LED (3W)
Lumen	320
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Battery (V/Ah)	2x 3,2V/3,3Ah LiFePO4
IP Rating	IP65
Impact Resistance	IK06
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	0
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

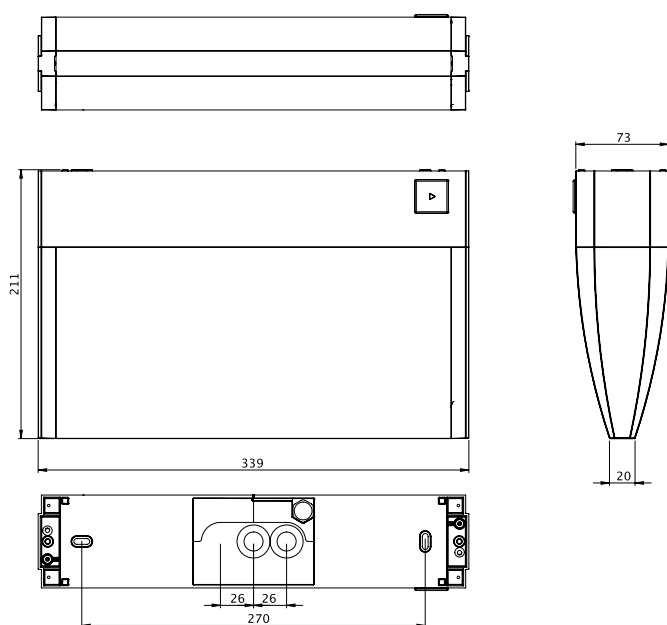

Article Table

DESCRIPTION	Order No.
Emerg. luminaire PX Wireless HP-LED 3h 230V AC ceiling viewing distance: 30m, with LiFePO4 battery, WirelessControl Professional type	NLPXD403WL
Optional Accessories	
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phosphpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV