

Data Sheet for Article: NLPXD509CC

Emergency luminaire PX HP-LED CC24 24V, ceiling mounting

with supervision - centrally switchable, viewing distance: 30m




Technical Data

Net length (mm)	339,00
Net width (mm)	73,00
Net height (mm)	211,00
Net weight (kg)	1,37
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	Plastic luminaire
Design	PX
Halogen-free	Housing made of halogen-free plastic
Colour	RAL 9003 (white)
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Viewing distance (m)	30

Technical Data - continued

Illuminant	LED (3W)
Lumen	335
Voltage range (V)	24V AC
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP Rating	IP65
Impact Resistance	IK06
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	50
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

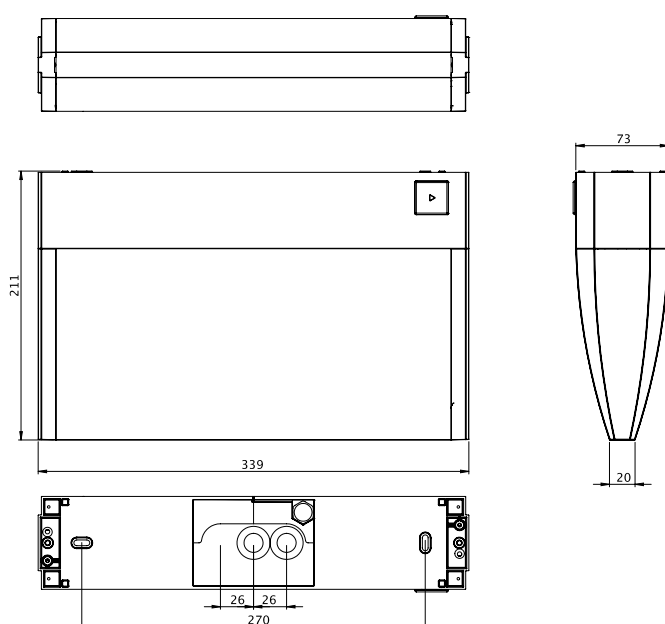

DESCRIPTION	Order No.
Emergency luminaire PX HP-LED CC24 24V, ceiling mounting with supervision - centrally switchable, viewing distance: 30m	NLPXD509CC