

Emergency luminaire WER ERT-LED 1x1W 230V AC/DC EL

Wall recessed mounting, Zinc die-cast, colour: white, with supervision - centrally switchable, recessed mounting with adapter frame in switch box Ø68mm, 140lm




Technical Data

Net length (mm)	90,00
Net height (mm)	90,00
Netto depth (mm)	21,00
Net weight (kg)	0,18
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	metal luminaire
Design	WER
Colour	RAL 9003 (white)
Illuminant	ERT-LED (1W)
Lumen	140
Voltage range (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,70
Power max. (W)	2,10
IP Rating	IP20
Impact Resistance	≥ IK03
Mounting	recessed wall mounting
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40


Technical Data - continued

AA Class E 8101	AA4
Manufacturer	Schrack


Dimensions (mm)

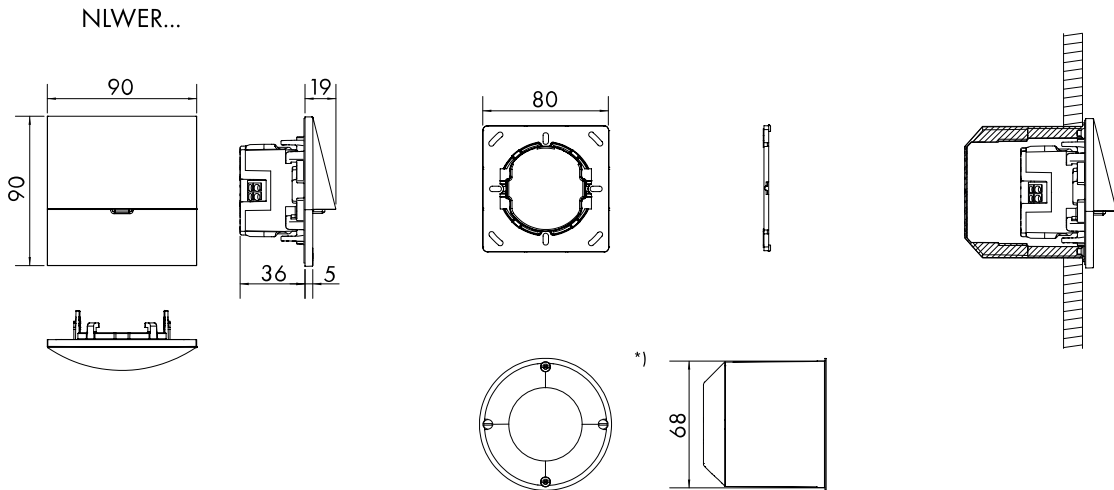

Floor plan illumination for wall mounting with mounting height 2,0m, maintenance factor 0,8

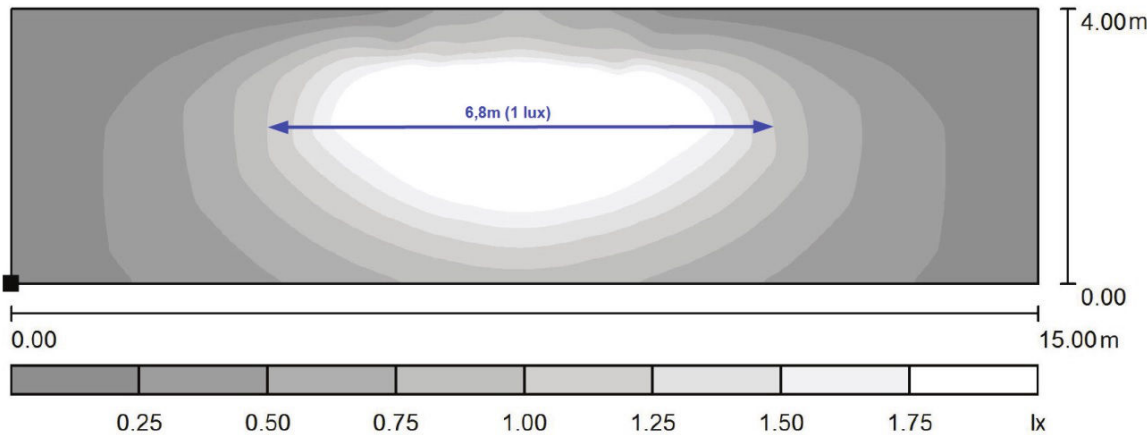

**Floor plan illumination for wall mounting with mounting height 0,5m,
maintenance factor 0,8**

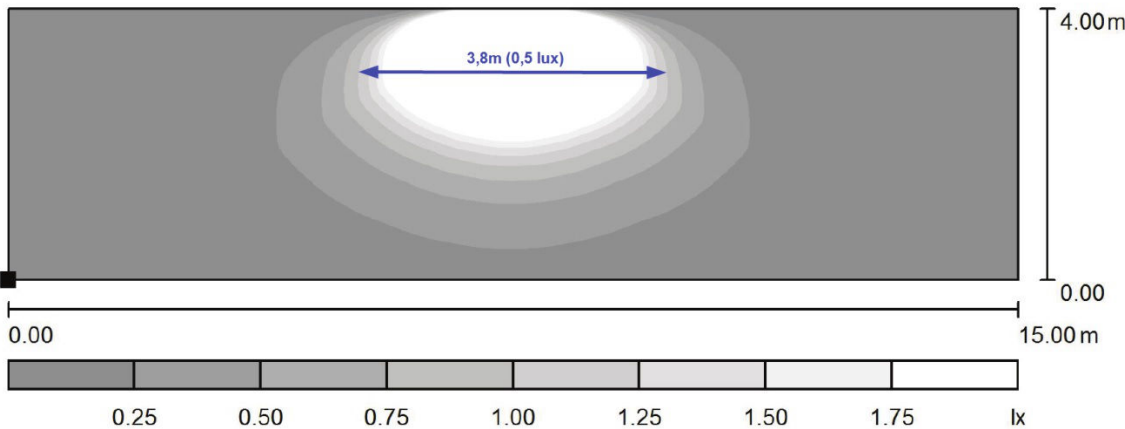

DESCRIPTION	Order No.
Emergency luminaire WER ERT-LED 1x1W 230V AC/DC EL	
Wall recessed mounting, Zinc die-cast, colour: white, with supervision - centrally switchable, recessed mounting with adapter frame NLWERW29EL in switch box Ø68mm, 140lm	