

Data Sheet for Article: NLWFXW009E

Emergency luminaire WFX EL LED IP65 230V, wall surface

Wall surface, with bayonet chain, centrally switchable, with single lamp supervision, Viewing distance: 60m, 230V AC/DC, Note: Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately






Technical Data

Net length (mm)	300,00
Net width (mm)	300,00
Net height (mm)	110,00
Net weight (kg)	1,40
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	edge luminaire
Design	WFX
Colour	RAL 9003 (white)
Pictogram	Required adhesive pictogram according to ISO 7010 to be ordered separately

Technical Data - continued

Viewing distance (m)	60
Illuminant	LED (5W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP Rating	IP65
Impact Resistance	IK04
Mounting	surface mounting wall
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

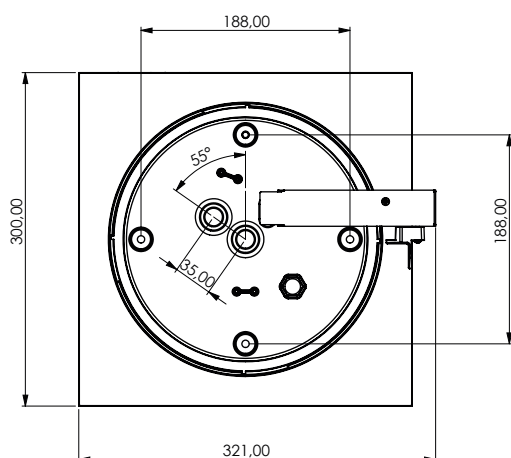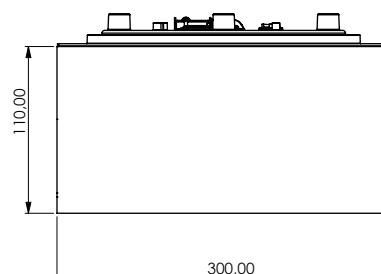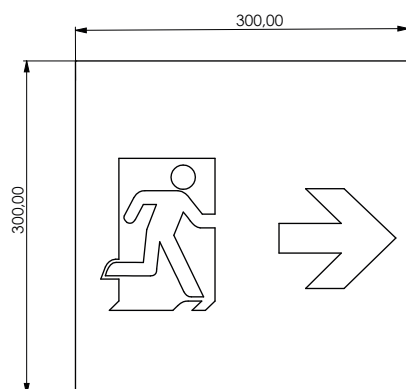

Article Table

DESCRIPTION	Order No.
Emergency luminaire WFX EL LED IP65 230V, wall surface	
Wall surface, with bayonet chain, centrally switchable, with single lamp supervision, Viewing distance: 60m, 230V AC/DC, Note: NLWFXW009E	
Delivery without pictogram - required pictogram NLWFXPIK.. must be ordered separately	
Necessary Accessories	
Adhesive pictogram arrow left for WFX	
Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKLI
Adhesive pictogram arrow up for WFX	
Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKOB
Adhesive pictogram arrow right for WFX	
Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKRE
Adhesive pictogram arrow down for WFX	
Factory fitted to an emergency luminaire NLWFXW00.., viewing distance: 60m	NLWFXPIKUN