

Data Sheet for Article: NLWHGD403W

Emergency luminaire WHG WL LED IP65 3h 230V AC ceiling mount

Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1 W High Power LED, IP65, WirelessControl Professional, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 50m, radio switchable, LiFePO4 battery, WirelessControl Professional type




Technical Data

Net length (mm)	522,00
Net width (mm)	500,00
Net height (mm)	280,00
Net weight (kg)	4,34
Luminaire type	emergency sign luminaire
Self contained - central battery	Self contained luminaire
Function	WirelessControl Professional
Version	Plastic luminaire
Design	WHG
Colour	RAL 9003 (white)

Technical Data - continued

Pictogram	Pictograms with arrows left, bottom, right in accordance with ISO 7010 already affixed at the factory
Viewing distance (m)	50
Backup time (h)	3
Illuminant	HP-LED (4W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$
Power maintained mode (W)	5,70
Power non-maintained mode (W)	0,80
Power max. (W)	7,50
Battery (V/Ah)	2x 3,2V/3,3Ah LiFePO4
IP Rating	IP65
Impact Resistance	$\geq IK03$
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-5
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

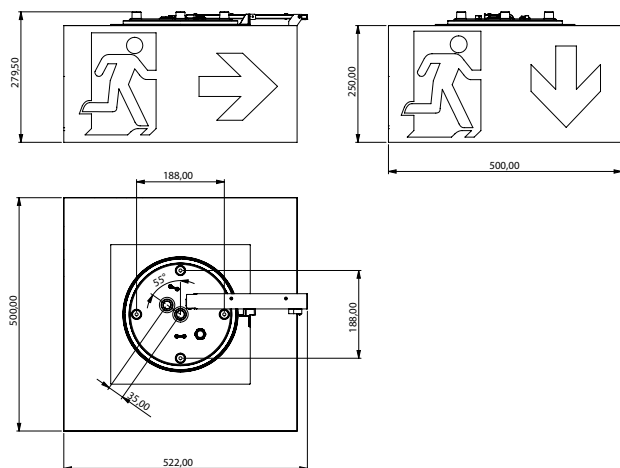

Article Table

DESCRIPTION	Order No.
Emergency luminaire WHG WL LED IP65 3h 230V AC ceiling mount Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1W High Power LED, IP65, WirelessControl Professional, 3h autonomy time; pictograms with arrows: left, down, right are already mounted, viewing distance: 50m, radio switchable, LiFePO4 battery, WirelessControl Professional type	NLWHGD403W
Optional Accessories	
Chain (4 pcs.) eye set for luminaire Design WG/WX	NLWKO
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG Tool-free length adjustment	NLDSAY4M
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG With ceiling adapter for surface mounting, tool-free length adjustment	NLDSAY4MAP
Set 2 accus LiFePO4 3,2V 3,3Ah f. luminaires. w. LEO or LPK LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries	NLAKKU323L
	NLTESTSC2
Protective cover for test buttons NLTEST2---	NLTEST2COV