

Data Sheet for Article: NLWHXDB09E

Emergency luminaire WHX EL LED IP65 230V, ceiling mount

Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1 W High Power LED, IP65, pictograms with arrows: left, up, right are already mounted, viewing distance: 30m






Technical Data

Net length (mm)	300,00
Net width (mm)	300,00
Net height (mm)	179,50
Net weight (kg)	1,62
Luminaire type	emergency sign luminaire
Self contained - central battery	Central power supply luminaire
Function	with monitoring - centrally switchable
Version	Plastic luminaire
Design	WHX
Colour	White
Pictogram	Pictograms with arrows left, up, right in accordance with ISO 7010 already affixed at the factory

Technical Data - continued

Viewing distance (m)	30
Illuminant	HP-LED (4W)
Voltage range (V)	230V AC 50Hz $\pm 20\%$; 230V DC $\pm 20\%$
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP Rating	IP65
Impact Resistance	$\geq IK03$
Mounting	surface mounting ceiling
Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
AA Class E 8101	AA4
Manufacturer	Schrack

Dimensions (mm)

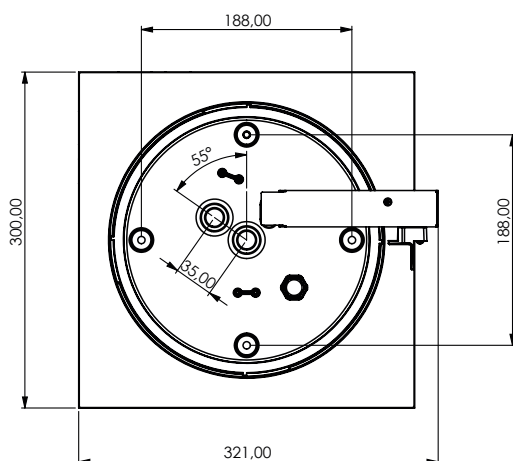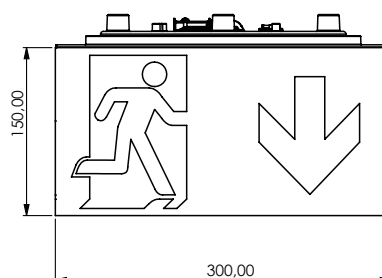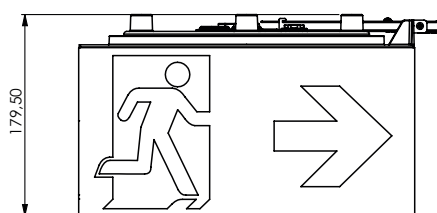

Article Table

DESCRIPTION	Order No.
Emergency luminaire WHX EL LED IP65 230V, ceiling mount	
Ceiling-mounted, optional: rope or chain mounting, with bayonet catch, with 4 x 1W High Power LED, IP65, pictograms with arrows: left, up, right are already mounted, viewing distance: 30m	NLWHXDB09E
Optional Accessories	
Chain (4 pcs.) eye set for luminaire Design WG/WX	NLWKO
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG	NLDSAY4M
Tool-free length adjustment	
Design-Y-Cord suspension 4000mm for cube luminaires WHX, WHG	NLDSAY4MAP
With ceiling adapter for surface mounting, tool-free length adjustment	