

Data Sheet for Article: NLZAA509CC

Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting

Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm




Technical Data

Net length (mm)	315,00
Net height (mm)	140,00
Netto depth (mm)	65,00
Net weight (kg)	2,20
Luminaire type	safety luminaire
Self contained - central battery	Central power supply luminaire
Function	24V Core24 with supervision- centrally switchable
Version	metal luminaire
Design	ZA
Colour	RAL 7016 (anthracite)
Illuminant	LED (2W)
Lumen	220
Voltage range (V)	24V AC


Technical Data - continued

Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
IP Rating	IP65
Impact Resistance	IK08
Mounting	surface mounting wall
Min. ambient temperature (°C)	-30
Max. ambient temperature (°C)	40
AA Class E 8101	AA3 AA4 AA5
Manufacturer	Schrack

Dimensions (mm)

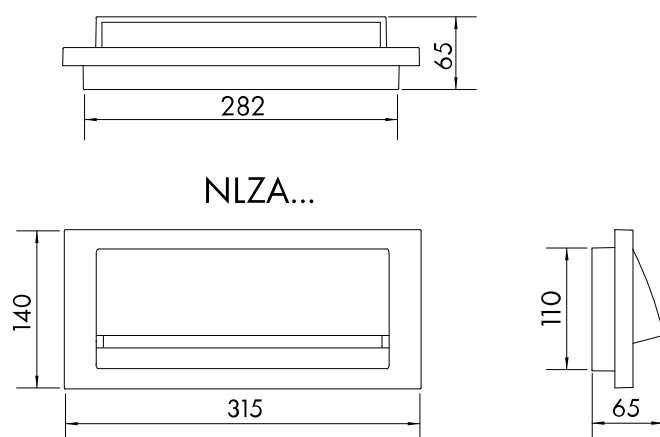

Drilling distances (mm)

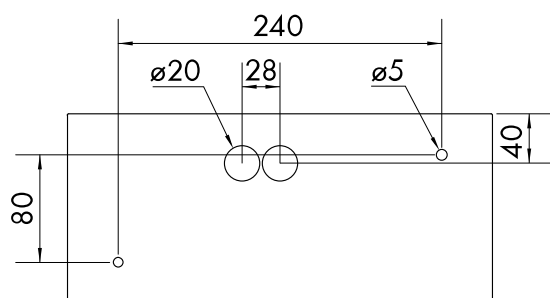

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	0,27	3,3	0,59	9,77	4,07
2,50	0,2	3,51	0,58	10,94	4,42
3,00	0,19	3,66	0,58	11,91	4,27
3,50	0,15	3,74	0,56	12,73	3,16
4,00	0,09	3,72	0,55	11,96	2,82

DESCRIPTION	Order No.
Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm	NLZAA509CC