

Data Sheet for Article: SR1478220S

# SORAX 19" Basicframe, RAL9005, W=800xD=1.200xH=2.200mm

47U, basic frame without planking parts



## SCHRACK-Info

### SORAX Server Enclosure


- Powder-coated enclosure (coarse structure - glossy)
- Enclosure: 12-fold profiled and welded
- Material: 1.5 - 2.5mm FE
- Color: Black RAL9005
- UV-resistant
- Maximum load with even distribution using cranked 19" profile rails: 2.000 kg
- Protection class: IP20 / IP54 depending on design
- Degree of protection enclosure: IK10
- Tested and built according to EN 62208 empty enclosure
- Installation height max. 2.000m above sea level
- Doors not included (can be ordered optionally)
- Side panels not included (can be ordered optionally)
- Base plate not included (can be ordered optionally)
- Roof plate not included (can be ordered optionally)
- 19" profile rails (4 pieces), galvanised and cranked (L-profile rails can be ordered as an option at no extra charge, reduced load capacity (1.200 kg with even distribution)), incl. height unit labelling
- 19" profile rails have a half pitch, depth-adjustable in 25mm increments
- 19" profile rail spacing can be extended to 23"

- 19" level spacing between rear of rack frame (inside) and rear 19" level: 375 mm
- 19" level spacing between rear and front 19" levels: 700 mm
- 19" level spacing between front 19" level and front of rack frame (inside): 75 mm
- Earthing: Protection class I - earthing connection with earthing rail and earthing connections pre-wired in accordance with EN 61439-3 (applies to optionally mountable flat parts)
- Stable and precise design of the complete enclosure
- Prepared for optional cold aisle containment
- Server enclosure is delivered fully assembled depending on the configuration (individual enclosure test for function)
- Server enclosure can also be available as a demountable version (can be ordered as an option at extra cost SR1AD0026S)
- Server enclosure can be retroactively and individually expanded in depth (extension frame, e.g., 1.200mm to 1.400mm)

## Technical Data

|                        |                              |
|------------------------|------------------------------|
| Net width (mm)         | 800,00                       |
| Net height (mm)        | 2.200,00                     |
| Netto depth (mm)       | 1.200,00                     |
| EAN                    | 9004840998689                |
| PRICE                  | 2.089,00                     |
| Colour                 | RAL 9005                     |
| HU                     | 47                           |
| IP Rating              | IP00                         |
| Manufacturer           | Schrack                      |
| Load capacity (static) | 2.000Kg                      |
| Product type           | Server rack                  |
| additionally required  | Planking parts (as required) |

**Dimensioned drawing: SORAX 19" Basicframe, RAL9005,  
W=800xD=1.200xH=2.200mm**

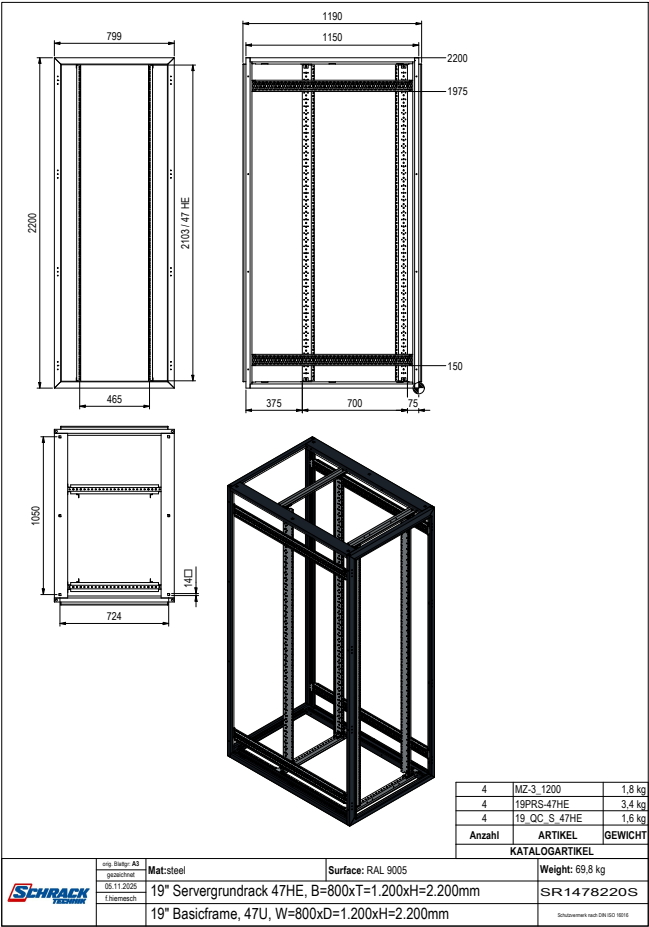

| DESCRIPTION                                            | Order No.  |
|--------------------------------------------------------|------------|
| SORAX 19" Basicframe, RAL9005, W=800xD=1.200xH=2.200mm | SR1478220S |
| 47U, basic frame without planking parts                |            |