


Data Sheet for Article: SR1D24261S

SORAX Ventilated Door, W=600xH=2.000mm, RAL7035

Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever

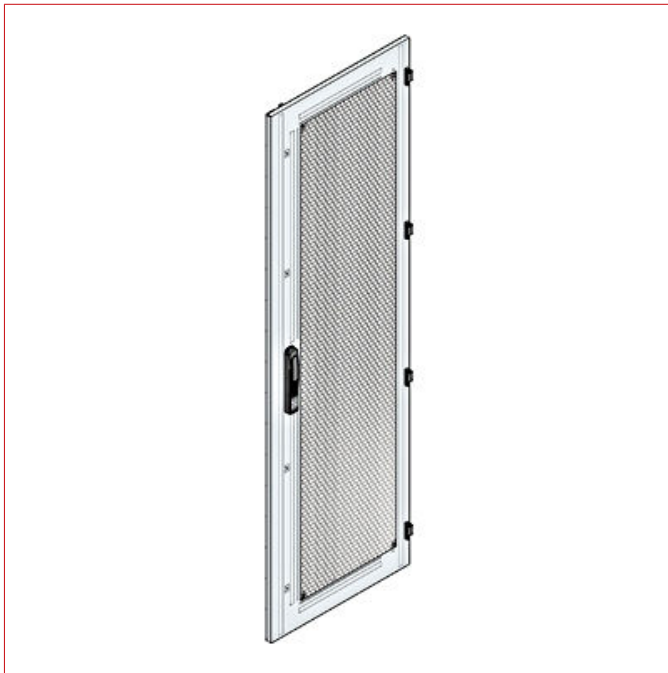

Product Details

- Ventilated door/ventilated (80% air flow)
- swivelling lever
- with rod lock
- Three-point locking
- door opening angle 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for neat cable routing
- RAL7035


Technical Data

Net width (mm)	600,00
Net height (mm)	2.000,00
Netto depth (mm)	25,00
EAN	9004840997095

Technical Data - continued

PRICE	348,30
Colour	RAL 7035
Product typ	Ventilated steel sheet door

Dimensioned drawing: SORAX Ventilated Door, W=600xH=2.000mm, RAL7035

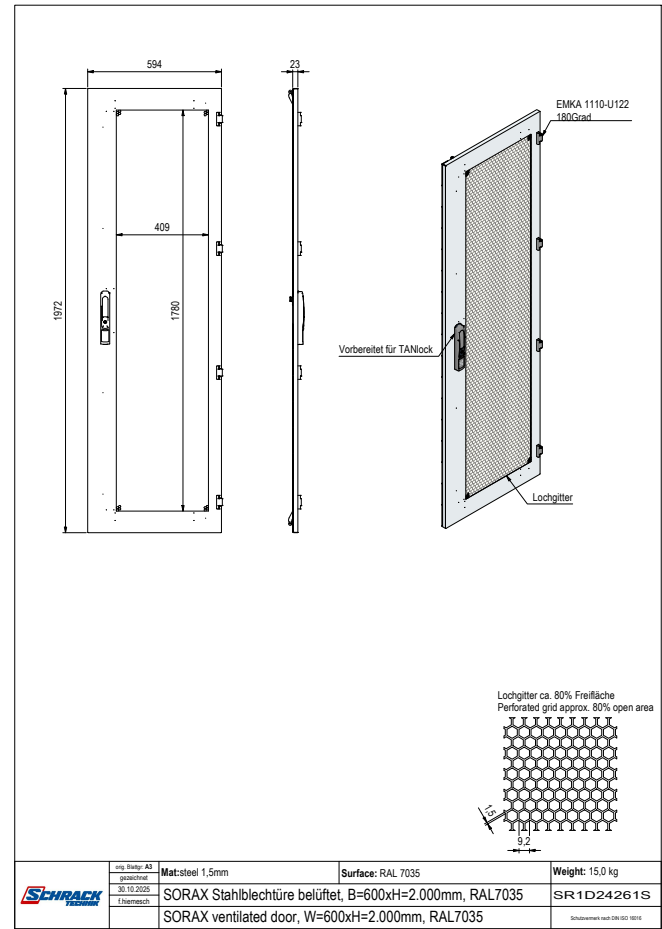

DESCRIPTION	Order No.
SORAX Ventilated Door, W=600xH=2.000mm, RAL7035	SR1D24261S
Opening angle of the door 180° (aligned), compatible for mounting a TANlock swivelling lever	