


Data Sheet for Article: WSAIE4030R

WSA Modular chassis 2-rows each 11MW, for H=400 W=300mm

swivelling, suitable for WSA4030210

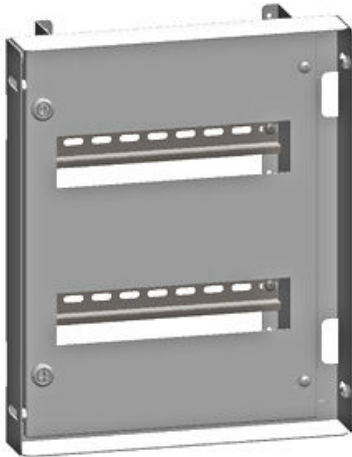

SCHRACK-Info

- For installation of modular devices on DIN-rails
- The distance between the DIN-rails (centre-centre) is 140mm
- The usable depth between the front cover of the WSAIE modular chassis and the WSA enclosure door is 82.5mm
- Material thickness: 1.2mm
- Degree of protection: IP3XD according to IEC 60529
- Color: RAL 7035 (Light grey)
- Supply includes:
 - 1 Piece of front door with 45mm cutouts
 - 2 Pieces of vertical profiles
 - 2 Pieces of closures (top/bottom)
 - DIN-rails
 - Mounting material


Technical Data

Net width (mm)	300,00
Net height (mm)	400,00
Netto depth (mm)	61,00

Technical Data - continued

Net weight (kg)	2,60
Colour	RAL 7035 (Light grey)

**Dimensioned drawing: WSA Modular chassis 2-rows each 11MW, for H=400
W=300mm**

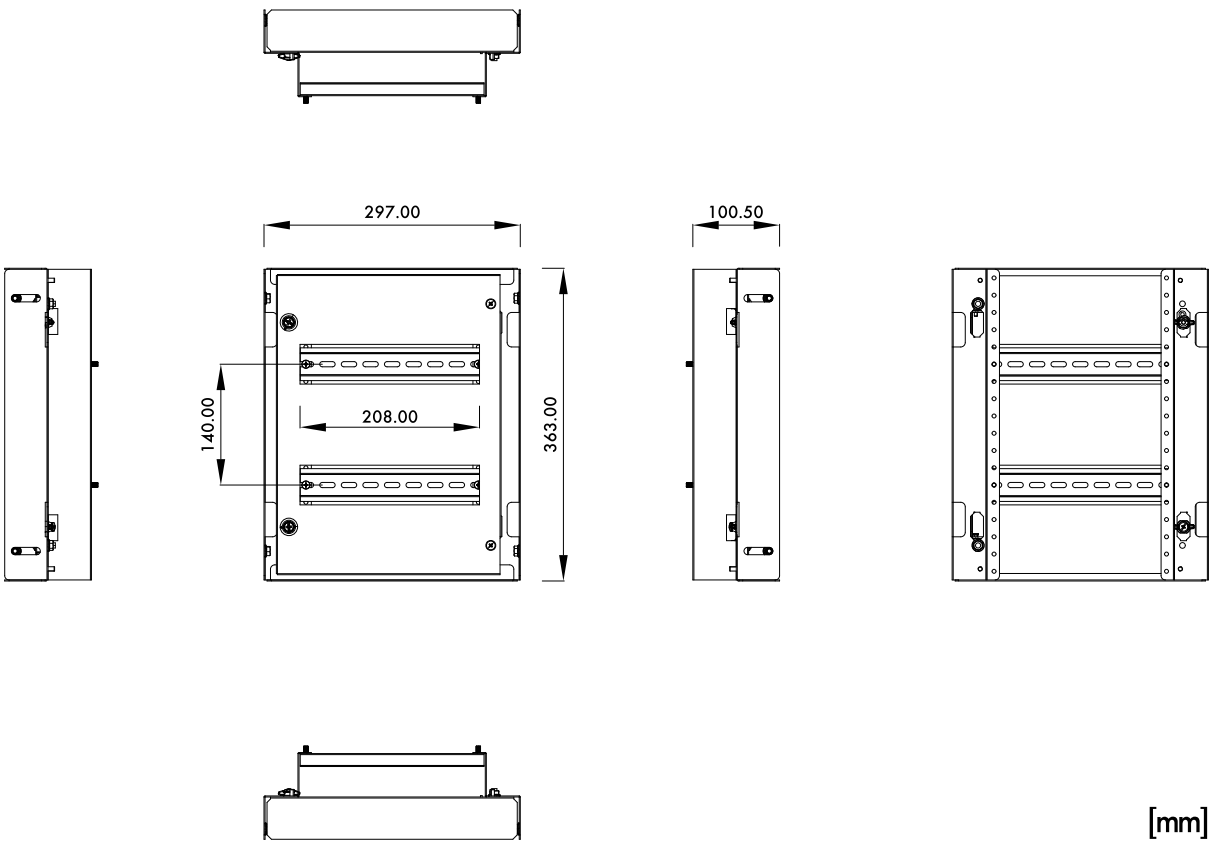

Article Table

DESCRIPTION	Order No.
WSA Modular chassis 2-rows each 11 MW, for H=400 W=300mm swivelling, suitable for WSA4030210	WSAIE4030R
Optional Accessories	
Plastic quarter turn lock for WSAIExxxxR	WSAIE00BL