

Data Sheet for Article: YRXT1110--

Plug-in socket, logical arrangement for 1-pole RXT relay


For Push in wiring. S-Relay, RXT series




Technical Data

Min. ambient temperature (°C)	-45
Max. ambient temperature (°C)	85
IP Rating	IP20
Pollution degree	3
Contact current (A)	16
Rated current [Resistive load] (A)	16
Connection type	Spring terminals
Between poles	2500V/s
Between contact and coil	4000V/s
Rated voltage	300VAC
Dielectric strength	-
Net weight (kg)	0,04
Solid wire diameter (mm ²)	0.5 - 1.5
Flexible wire diameter (mm ²)	0.5 - 1.5
Flexible wire with ferrule (diameter) (mm ²)	0.5 - 1.5

Circuit diagram: Plug-in socket, logical arrangement for 1-pole RXT relay

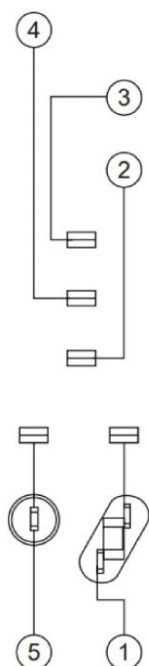

Dimensioned drawing: Plug-in socket, logical arrangement for 1-pole RXT relay

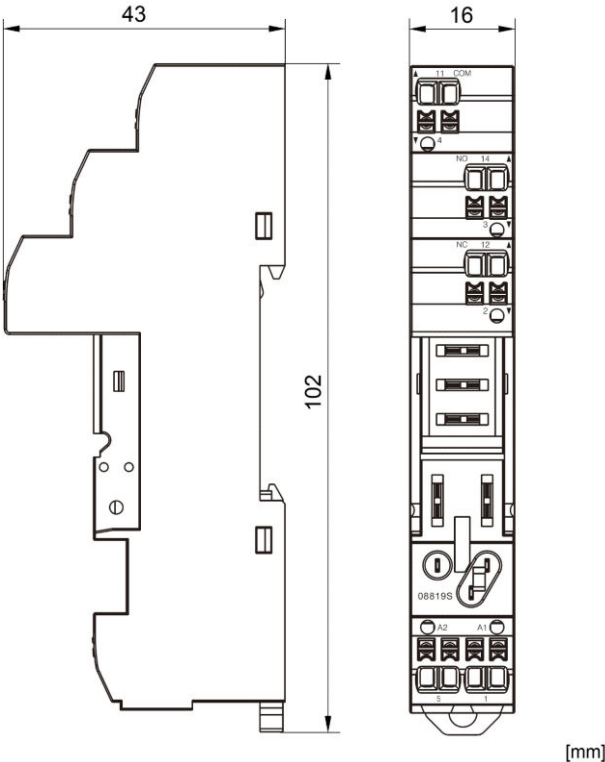

Article Table

DESCRIPTION	Order No.
Plug-in socket, logical arrangement for 1-pole RXT relay For Push in wiring. S-Relay, RXT series	YRXT1110
Optional Accessories	
Retaining clip for RXT relays S-Relay, RXT series	YRXT4000
Marking tag for YRXT and YRTS socket S-Relay	YRXT2000
Bus jumper for YRS5 und YRXT push-in sockets S-Relay	YRS60000
Protection diode module 6-250VDC for S-Relay socket S-Relay	YRS13250
LED+PD module green 6-24VDC A1+ for S-Relay socket S-Relay	YRS12024
LED module green 24VAC/DC for S-Relay socket S-Relay	YRS11524

Article Table

DESCRIPTION	Order No.
Optional Accessories	
LED module green 110-240VAC for S-Relay socket S-Relay	YRS11730
RC-Network module 6-24VAC for S-Relay socket S-Relay	YRS14524
	YRS14730
LED+PD module red 6-24VDC A1+ for S-Relay socket S-Relay	YRS16024
LED module red, 110-240VAC for S-Relay socket S-Relay	YRS15730