

Data Sheet for Article: YY764516--

CEE-Wall mounted socket, 5-pole, 16A, 400V, IP44

EN 60309-1, EN 60309-2



Schrack-Info

- Cables inserts from above or back side possible
- For wall mounting / surface mounting
- Suitable for dusty and humid environments
- Top availability

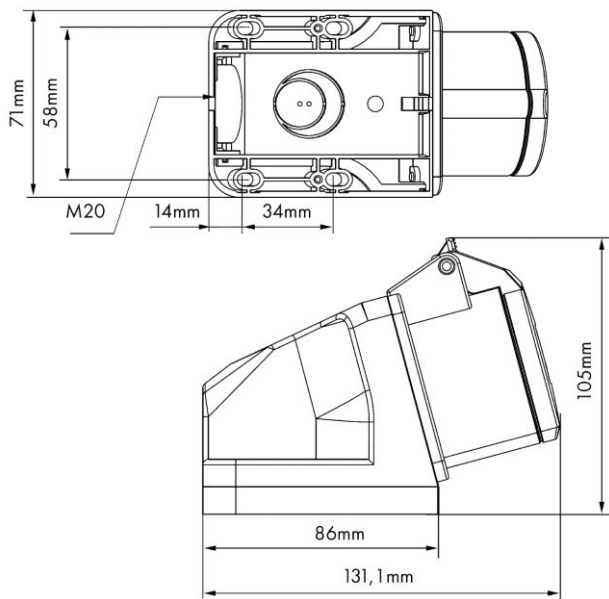


Technical Data

Min. ambient temperature (°C)	-20
Max. ambient temperature (°C)	40
Rated current (A)	16
Poles	5
Contact arrangement	3P+N+PE
IP Rating	IP44
Color code	red
Position of the protective earth contact	6h

Technical Data - continued

Rated operating voltage (V)	230/415
Insulation voltage withstand (V)	690
Frequency (Hz)	50/60
Material	PA66 PA6 PC/ABS
Contact material	Brass
Connection type	Screw clamps
Standard	EN 60309-1 EN 60309-2
Min. cross section, solid wire (mm ²)	1,50
Max. cross section, solid wire (mm ²)	4
Min. cross section, solid wire, stranded (mm ²)	1,50
Max. cross section, solid wire, stranded (mm ²)	4
Min. cross section, flexible wire with ferrule (mm ²)	1,50
Max. cross section, flexible wire with ferrule (mm ²)	2,50
Min. cross section, flexible wire (mm ²)	1,50
Max. cross section, flexible wire (mm ²)	2,50
Max. cable diameter (mm)	16,50
Stripping length L/N (mm)	12
Stripping length PE (mm)	15
Max. torque (Nm)	0,80
Glow wire resistance (°C)	650
Impact Resistance	IK07

Dimensioned drawing: CEE-Wall mounted socket, 5-pole, 16A, 400V, IP44

Article Table

DESCRIPTION	Order No.
CEE-Wall mounted socket, 5-pole, 16A, 400V, IP44 EN 60309-1, EN 60309-2	YY764516
Optional Accessories	
Cable fittings M20x1.5, RAL 7035 Clamping range 7 - 12mm, wrench size 24mm	M270020