





Data Sheet for Article: HSELS240LS

FO Splicebox empty for 12 LC-Duplex couplers, 1U, black

PREMIUM

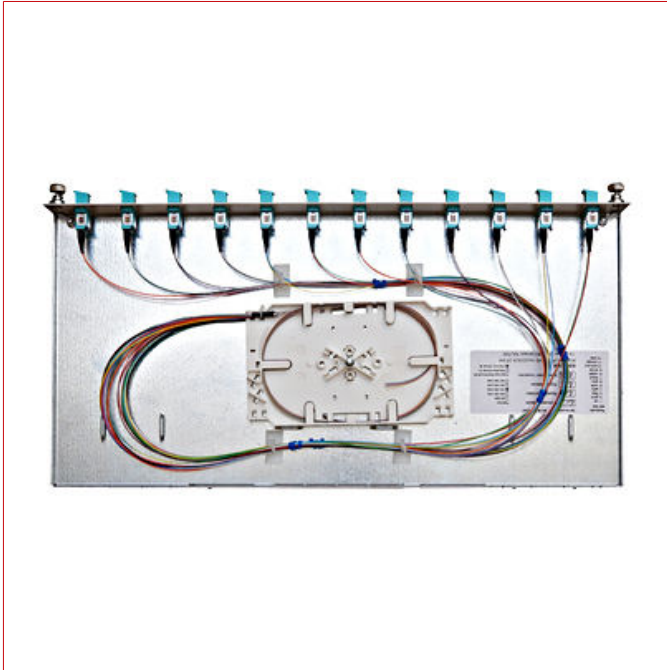

SCHRACK-Info

These spliceboxes comprise an upper enclosure section, a pull-out tray and 2 depth-adjustable 19" brackets. Pull-out trays are locked via two knurled screws for 12 LC Duplex couplers

Cable-entry:

- Four break-away style openings for M20 cable-gland
- One break-away style opening for optional available cable strain-relief (HSELSFTTDM)

Material: zinc-coated steel

Installation: 19", 1U



Dimensions WxHxD: 483x44x240mm

Color: black

Technical Data

Net width (mm)	482,50
Net height (mm)	43,60
Netto depth (mm)	211,50
Net weight (kg)	2,70
Colour	RAL 9005 (black)
Min. ambient temperature (°C)	-10
Max. ambient temperature (°C)	70
Product	Empty Enclosures

Dimension drawing

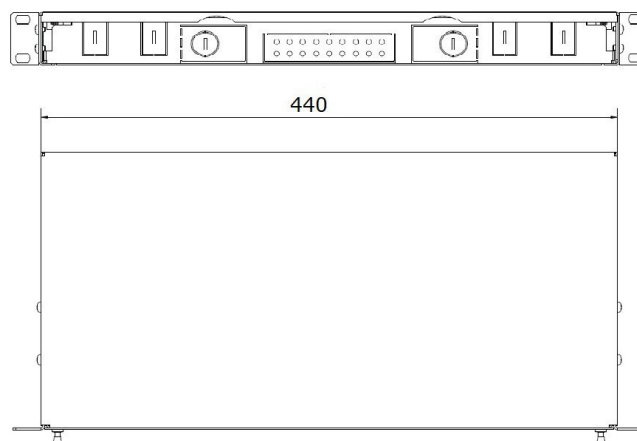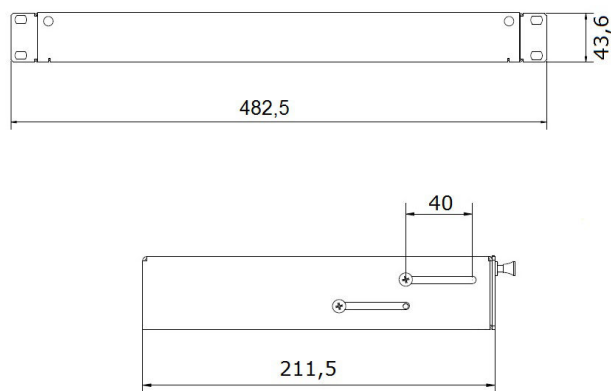

Article Table

DESCRIPTION	Order No.
FO Splicebox empty for 12 LC-Duplex couplers, 1U, black PREMIUM	HSELS240LS
Optional Accessories	
FO Splicecassette without cover, without fiber holder stackable, white, PREMIUM	HSELSZSK01
FO splice holder for 6 shrink splice protectors (HELSP0001x) black, suitable for splice cassette HSELSZSK01, PREMIUM	HSELSZSK02
FO splice cassette cover, white for HSELSZSK01 PREMIUM	HSELSZSK03
Integral hinge for connecting / stacking of HSELSZSK01, blue PREMIUM	HSELSZSK04
FO splice holder f. 12 shrink splice protectors (HELSP0001x) black, suitable for splice cassette HSELSZSK01, PREMIUM	HSELSZSK05
FO shrink splice protector 60mm	HELSP00011
Cable gland M20 LVZZKVS20	HELSP00012
Cable fittings M20x1.5, RAL 7035 Clamping range 7 - 12mm, wrench size 24mm	M270020
Metric Counter Nut M20x1.5	M271020
FO Blind cover for LC-Duplex/SC-Simplex cutout, black, 25pcs	HLZPZKBX02
FO Coupler LC-Duplex, Plastic, Multimode, phosphorbronze without flange, inner shutter, grey, PREMIUM	HMOLO00011
FO Coupler LC-Duplex, Plastic, OS2, ceramic, flange blue, CLASSIC	HSELSK09LP
FO Pigtail LC, 50/125µm OM4, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP04L042P
FO Pigtail LC, 9/125µm OS2, 2.0m, Easy Strip, 4pcs colored according to IEC 60304, CLASSIC	HLP09L042P
FO Pigtail LC, 9/125µm OS2, 2.0m, Easy Strip, 8pcs colored according to IEC 60304, CLASSIC	HLP09L082P
FO Pigtail LC, 9/125µm OS2, 2.0m, Easy Strip, 12pcs colored according to IEC 60304, CLASSIC	HLP09L122P
FO Coupler LC/APC-Duplex, Plastic, OS2, ceramic, flange green, CLASSIC	HSELSK09MP
FO Coupler LC-Duplex, Plastic, OM3, ceramic, flange aqua, CLASSIC	HSELSK03LP